


CATERING VAN STOCK SPARE PARTS

2019 EDITION ONE



AT THE  OF CATERING
EQUIPMENT SERVICE



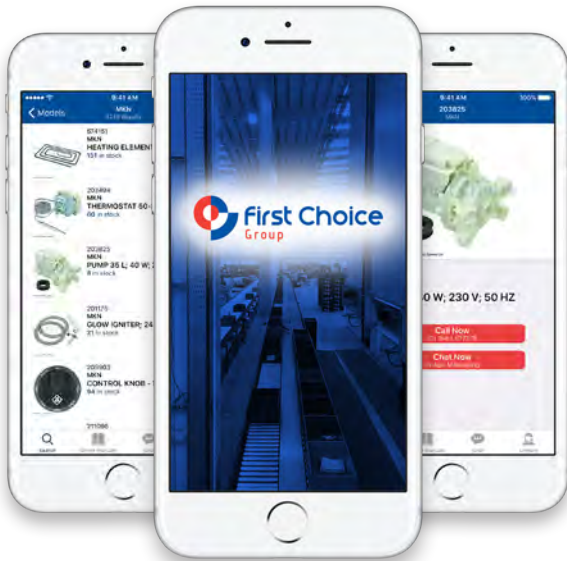

YOUR SERVICE COMPANION APP

 **FIND PARTS AND AVAILABILITY**

 **LIVE CHAT WITH OUR TEAM**

 **VIEW EQUIPMENT DIAGRAMS**

DOWNLOAD FOR FREE TODAY!



 **FIRST CHOICE GROUP**



CUSTOMER SERVICE CENTRE

Opening Hours

Monday – Friday 08:30 – 17:30
Saturday 08:30 – 12:30

Telephone 01543 577 778
Email enquiries@firstchoice-cs.co.uk
Web www.firstchoice-cs.co.uk

Address

Blakeney Way, Kingswood Lakeside,
Cannock, Staffordshire, WS11 8LD

Payment

BACS, cheque and all major credit / debit cards

Delivery

We aim to provide the very best delivery service for your urgent orders, so items are carefully packaged by our despatch department and orders for stock items received before 17:00 are shipped by an overnight service for next-day delivery.

If our standard next-day service is not quick enough then we offer, at a small premium, the following services which cater for any eventuality.

Next-day before 12:00 noon guaranteed

Next-day before 10:30 guaranteed

Next-day before 09:00 guaranteed (dependant on postcode)

Saturday morning between 08:00 to 12:00 noon

Same-day by courier (time restrictions apply)

 Catering Spares

 Refrigeration Spares

 Laundry Spares

 Bakery Spares

 Coffee Spares

 Technical Training

AT THE ♥ OF CATERING EQUIPMENT SERVICE



CONTENTS

PILOT BURNERS, JETS & FITTINGS	04-06	WATER BOILER TAPS	65
GAS IGNITERS & LEADS	06-08	WATER FILTERS & SOFTENERS	66-70
THERMOCOUPLES & THERMOPILES	08-12	DESCALER	70
GAS VALVES AND TAPS	12-17	CASTORS & FEET	71-74
GAS HOSES & PIPE FITTINGS	17-19	CABINET/HOTCUPBOARDS DOOR FITTINGS	74-75
GAS SEALANTS, LUBRICANTS & LEAK DETECTOR SPRAYS	20-21	GN SHELVES / DISHWASHER RACKS	75-76
WARNING LABELS & NOTICE PADS	21	GAS TESTING INSTRUMENTS	77-80
TERMINALS AND CRIMPING SETS	22-25	THERMOMETERS	81-83
CABLES, CABLE FITTINGS PLUGS & FUSES	26-29	ELECTRICAL TESTING INSTRUMENTS & SAFETY EQUIPMENT	84-91
SWITCHES	30-32	BRAZING TOOLS & CONSUMABLES	92-93
THERMOSTATS	32-35	PIPE CLIPS, O-RING SETS & FASTNERS	94-95
CONTROL KNOBS	35-36	HAND TOOLS & EQUIPMENT	96-102
ENERGY REGULATORS	36-37	TOOL BAGS & BOXES	103-104
CONTACTORS AND RELAYS	38	GAS SAFE KIT	104
LAMPS	39-44	SEALANTS	105
HEATING ELEMENTS	45	LUBRICANTS, GREASES & CLEANING SPRAYS	106-107
FANS	46-47	ADHESIVES	107
WATER SOLENOID VALVES	48-49	GLOVES & HAND WIPES	108
PUMPS	50		
CAPACITORS	51		
DETERGENT & RINSE AID DOSING PUMPS & FITTINGS	51-52		
DRAINAGE FITTINGS & HOSES	53-54		
WATER CONNECTION HOSES	55-57		
WATER CONNECTION FITTINGS	58		
SINK DRAIN VALVE SPARE PARTS	59		
PRE-RINSE SPARE PARTS	60-63		
CONTRACT TAPS	64		

Prices are correct at time of going to print and are subject to change without notice

SIT 100 SERIES PILOT BURNER

Multigas with either a 0.20mm or 0.35mm jet. Supplied with 2 position bracket.



Description	Injector	No. of positions	Part No.
TWO FLAME SIDE ENTRY PILOT	0.20mm	2	0.100.020
THREE FLAME SIDE ENTRY PILOT	0.20mm	2	0.100.025
THREE FLAME SIDE ENTRY PILOT	0.20mm	3	0.100.001
THREE FLAME SIDE ENTRY PILOT	0.35mm	3	0.100.004

SIT 140 SERIES PILOT BURNER

Jet and electrode not included

Description	Part No.
ONE FLAME PILOT BURNER	0.140.026
ONE FLAME PILOT BURNER	0.140.028
TWO FLAME PILOT BURNER	0.140.015



SIT 145 SERIES PILOT BURNER

Jet and electrode not included

Description	Part No.
ONE FLAME PILOT BURNER - LEFT HAND	0.145.007
ONE FLAME PILOT BURNER - RIGHT HAND	0.145.010



SIT 150 SERIES PILOT BURNER

Jet and electrode not included

Description	Part No.
TWO FLAME PILOT BURNER	0.150.085



SIT 160 SERIES PILOT BURNER

Jet and electrode not included

Description	Part No.
THREE FLAME PILOT ASSEMBLY	0.160.042



ROBERTSHAW PILOT ASSEMBLIES

Multipurpose NG/LPG

Description	Part No.
ONE FLAME PILOT ASSEMBLY	2CH-10

Description	Part No.
TWO FLAME PILOT ASSEMBLY	5CL2

Description	Part No.
THREE FLAME PILOT ASSEMBLY	6CH14-1



SIT PILOT JETS

Description	Part No.
PILOT JET LPG Ø 0.20mm	0.977.030
PILOT JET NG/LPG Ø 0.25mm	0.977.051
PILOT JET NG Ø 0.35mm	0.977.031
PILOT JET NG Ø 0.40mm	0.977.032

Description	Part No.
PILOT JET NG Ø 0.27mm	0.977.113
PILOT JET LPG Ø 0.14mm	0.977.115
PILOT JET NG Ø 0.35mm	0.977.091
PILOT JET LPG Ø 0.19mm	0.977.092

Description	Part No.
PILOT JET LPG Ø 0.30mm	0.977.122
PILOT JET LPG Ø 0.25mm	0.977.123
PILOT JET NG Ø 0.41mm	0.977.118



PILOT JETS

Description	Part No.
PILOT GAS JET Ø 0.20 MM	210010
PILOT GAS JET Ø 0.50 MM	210011



Compartment Organisers available on page 96

PILOT TUBE NUTS & OLIVES


Description	Part No.
PILOT NUT FOR PIPE Ø 4mm	0.958.013
PILOT NUT FOR PIPE Ø 6mm	0.958.011
Description	Part No.
COMPRESSION NUT FOR PIPE Ø 3/16"	209021
COMPRESSION NUT FOR PIPE Ø 1/4"	209022
Description	Part No.
PILOT OLIVE FOR PIPE Ø 4mm	0.957.014
PILOT OLIVE FOR PIPE Ø 6mm	0.957.015
Description	Part No.
PILOT OLIVE FOR PIPE Ø 4mm	0.957.009
Description	Part No.
OLIVE FOR PIPE Ø 6mm	0.957.010
OLIVE FOR PIPE Ø 6mm	0.957.001
OLIVE FOR PIPE Ø 12mm	0.957.007



COPPER PILOT PIPE

Sold in 5 metre lengths.

Description	Part No.
COPPER PILOT PIPE Ø 1X4mm	209200
COPPER PILOT PIPE Ø 1X6mm	209201



IGNITION ELECTRODES

Description	Connection	Overall Length	Part No.
IGNITION ELECTRODE - 7x44mm	M4 male	82mm	0.915.015
IGNITION ELECTRODE - 7x26.4mm	M4 male	65mm	0.915.036
IGNITION ELECTRODE - 7x35mm	2.4mm dia female	61mm	202009
Description	Part No.		
SPARK ELECTRODE FIXING NUT M10X1	0.974.037		



Compartment Organisers available on page 96

PIEZO IGNITERS

Description	Part No.
PIEZO IGNITER - 18mm dia 2.4mm flat connection	202001
PIEZO IGNITER - 22mm dia 2.4mm flat connection	202002
PIEZO IGNITER - 18mm dia 2.4mm dia connection	202010
PIEZO IGNITER - 22mm dia 2.4mm dia connection	202011



PIEZO IGNITER

Description	Part No.
PIEZO IGNITER - 18mm dia 2.4mm dia connection	202012



HT IGNITER LEADS

White rubber silicone glass outer cable with black inner cable rated to 10 kV at 200°C max temperature. 2.8mm x 0.5mm spade terminals protected with 25mm long sleeving at both ends.

Description	Part No.
IGNITION LEAD - 350mm long	203001
IGNITION LEAD - 450mm long	203002
IGNITION LEAD - 750mm long	203003
IGNITION LEAD - 1250mm long	203004



HT IGNITER CABLE

Insulated cable suitable for temperatures up to 200°C supplied in a 10m roll.

Description	Part No.
HT IGNITER CABLE - 10M ROLL	203010



IGNITER TERMINALS

Insulated terminals supplied in a pack of 20.

Description	Connections	Part No.
INSULATED SPADE TERMINALS	2.8x0.8mm	102051
INSULATED SPADE TERMINALS	6.3x0.8mm	102052
INSULATED ROUND TERMINALS	4.0mm dia	102053
UNINSULATED ROUND TERMINALS	2.4mm dia	102054



Compartment Organisers available on page 96

SIT IGNITION CONTROL BOX 503 EFD


220-240V 50/60Hz



Description	Part No.
IGNITION CONTROL BOX SVT TW1.5s TS60s 7VA	0.503.204
IGNITION CONTROL BOX DMT TW1,5s TS30s 9VA	0.503.702

SUPER UNIVERSAL THERMOCOUPLES

Multi application thermocouple kit supplied with a wide range of adapters and slotted elements. Millivolt output minimum of 50mV normally MW.



Description	Part No.
SUPER UNIVERSAL THERMOCOUPLE 900mm	208001
SUPER UNIVERSAL THERMOCOUPLE 1500mm	208004
SUPER UNIVERSAL THERMOCOUPLE 900mm NICKEL	208002

SUPER UNIVERSAL THERMOCOUPLE WITH INTERRUPTER

Multi application thermocouple kit supplied with a wide range of adapters and slotted elements.




Description	Part No.
SUPER UNIVERSAL THERMOCOUPLE 900mm	208003

SIT UNIVERSAL THERMOCOUPLES

Series S 200 thermocouples supplied with:

- + 4 connectors M10x1 7/16", M8x1-M9-1 milled 11/32, M10x1 milled
- + 2 bushes Ø6x8.5 and Ø6x17.5
- + 2 adapter rings
- + 2 spacers Ø6x7.5 and Ø6x2.5

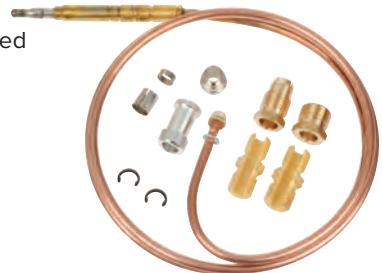

Description	Part No.
SIT UNIVERSAL THERMOCOUPLE 900mm	0.208.002
SIT UNIVERSAL THERMOCOUPLE 1200mm	0.208.004

SIT 200 SERIES THERMOCOUPLES

Description	Sleeve Type	Part No.
SIT THERMOCOUPLE M8X1 320mm	S335	0.200.042
SIT THERMOCOUPLE M8X1 600mm	S335	0.200.044
SIT THERMOCOUPLE M8X1 600mm	S332	0.200.124
SIT THERMOCOUPLE M8X1 850mm	S335	0.200.046
SIT THERMOCOUPLE M8X1 1000mm	S335	0.200.047
SIT THERMOCOUPLE M8X1 1200mm	S335	0.200.049
SIT THERMOCOUPLE M8X1 1200mm	S332	0.200.129
SIT THERMOCOUPLE M8X1 1500mm	S335	0.200.050
SIT THERMOCOUPLE M8X1 1500mm	S332	0.200.130
SIT THERMOCOUPLE M9X1 400mm	S332	0.200.005
SIT THERMOCOUPLE M9X1 500mm	S332	0.200.007
SIT THERMOCOUPLE M9X1 600mm	S335	0.200.055
SIT THERMOCOUPLE M9X1 750mm	S332	0.200.011
SIT THERMOCOUPLE M9X1 850mm	S332	0.200.013
SIT THERMOCOUPLE M9X1 850mm	S335	0.200.057
SIT THERMOCOUPLE M9X1 1000mm	S335	0.200.058
SIT THERMOCOUPLE M9X1 1000mm	S332	0.200.015
SIT THERMOCOUPLE M9X1 1200mm	S332	0.200.019
SIT THERMOCOUPLE M9X1 1500mm	S332	0.200.021



S335 SLEEVE



S332 SLEEVE

SIT 270 SERIES INTERRUPTED THERMOCOUPLE

Description	Sleeve Type	Part No.
INTERRUPTED THERMOCOUPLE M9X1 100mm	S332	0.270.400
INTERRUPTED THERMOCOUPLE M9X1 320mm	S332	0.270.407
INTERRUPTED THERMOCOUPLE M9X1 600mm	S332	0.270.408



S332 SLEEVE

SIT 290 SERIES QUICK THERMOCOUPLES

The 290 series is made for use on all those gas appliances in which a very brief closure time is required on shutdown together with long life.

Description	Sleeve Type	Part No.
SIT QUICK THERMOCOUPLE M9X1 600mm	S332	0.290.016
SIT QUICK THERMOCOUPLE M9X1 850mm	S332	0.290.018
SIT QUICK THERMOCOUPLE M9X1 1000mm	S332	0.290.019
SIT QUICK THERMOCOUPLE M9X1 1500mm	S332	0.290.022
SIT QUICK THERMOCOUPLE 1 1/32 ASA 850mm	S332	0.290.025
SIT QUICK THERMOCOUPLE M9X1 450mm	S333	0.290.084
SIT QUICK THERMOCOUPLE M9X1 600mm	S333	0.290.150
SIT QUICK THERMOCOUPLE M9X1 1500mm	S333	0.290.092



S332 SLEEVE



S333 SLEEVE

ROBERTSHAW UNIVERSAL C3 THERMOCOUPLES

Description	Part No.
18" C3 UNIVERSAL THERMOCOUPLE	1970-018
24" C3 UNIVERSAL THERMOCOUPLE	1970-024
36" C3 UNIVERSAL THERMOCOUPLE	1970-036
48" C3 UNIVERSAL THERMOCOUPLE	1970-048
60" C3 UNIVERSAL THERMOCOUPLE	1970-060
72" C3 UNIVERSAL THERMOCOUPLE	1970-072




ROBERTSHAW SNAP FIT THERMOCOUPLES

Description	Part No.
18" SNAP FIT THERMOCOUPLE	1980-018
24" SNAP FIT THERMOCOUPLE	1980-024
36" SNAP FIT THERMOCOUPLE	1980-036
48" SNAP FIT THERMOCOUPLE	1980-048
60" SNAP FIT THERMOCOUPLE	1980-060
72" SNAP FIT THERMOCOUPLE	1980-072



ROBERTSHAW HEAVY DUTY THERMOCOUPLES

Description	Part No.
18" HEAVY DUTY THERMOCOUPLE	1900-018
24" HEAVY DUTY THERMOCOUPLE	1900-024
36" HEAVY DUTY THERMOCOUPLE	1900-036
48" HEAVY DUTY THERMOCOUPLE	1900-048

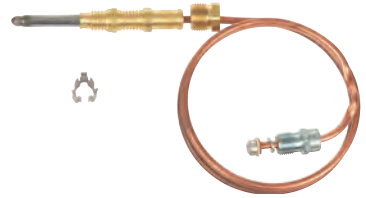

BLACK TEKNIGAS THERMOCOUPLE

Description	Part No.
HIGH TEMPERATURE THERMOCOUPLE 330MM	803022HT



ROBERTSHAW 36" TWIN LEAD THERMOPILE

Description	Part No.
36" TWIN LEAD THERMOPILE	21436



SIT THERMOCOUPLE EXTENSION

Description	Part No.
SIT THERMOCOUPLE EXTENSION M9X1 600mm	0.218.101



UNIVERSAL THERMOCOUPLE EXTENSION

Description	Part No.
UNIVERSAL THERMOCOUPLE EXTENSION M9X1 900mm	208006



THERMOCOUPLE FITTINGS

Description	Part No.
SLOTTED FITTING M8X1	208100
SLOTTED FITTING M9X1	208101
SLOTTED FITTING M10X1	208102
SLOTTED FITTING ASA M11X32	208103
Description	Part No.
INTERRUPTION CONNECTOR M8X1	208104
INTERRUPTION CONNECTOR M9X1	208105
INTERRUPTION CONNECTOR ASA M11	208106



SIT THERMOCOUPLE FIXING NUTS

Description	Part No.
THERMOCOUPLE NUT M10x1	0.974.036
NUT FOR THREADED THERMOCOUPLE SLEEVES M8x1	0.992.014



THERMOCOUPLE TESTER

Description	Part No.
THERMOCOUPLE TESTER	702030



GAS TAP & GASKET


Description	Part No.
GAS TAP SUPPLIED WITH GASKET	206015



ROBERTSHAW GAS THERMOSTAT

- + Temperature range 200-375°F
- + Capillary length 24" with bulb 3/8" x 5 3/8"
- + Gas inlet/outlet 1/4"
- + With 3/8" gland

Description	Part No.
ROBERTSHAW GAS THERMOSTAT	GSH3-024



PEL 21/SV GAS VALVE

- + With pilot flame
- + Fittings M16x1.5mm
- + Shaft for control knob D10x8mm

Description	Thermocouple Connection	Part No.
21/SV GAS VALVE	M8x1mm	207010
21/SV GAS VALVE	M9x1mm	207011



PEL 22/0 GAS VALVE

- + With pilot flame and horizontal flange
- + Fittings M20x1.5mm
- + Shaft for control knob D 8x6.5mm


Description	Thermocouple Connection	Part No.
22S/0 GAS VALVE	M9x1mm	207016
22/0 GAS VALVE WITH FLOW REGULATOR	M9x1mm	207017



PEL 24ST THERMOSTATIC GAS VALVE

- + Temperature regulation range 120-320°C
- + Fittings M20x1.5mm
- + Capillary length 1200mm with bulb 6x100mm
- + Shaft for control knob D 10x8mm

Description	Thermocouple Connection	Part No.
24ST THERMOSTATIC GAS VALVE M9x1	M9x1mm	207021

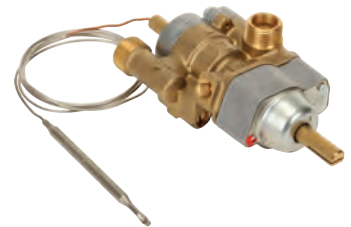

PEL 25ST THERMOSTATIC GAS VALVE

- + Temperature regulation range 120-320°C
- + Fittings M16x1.5mm
- + Capillary length 1200mm with bulb 6x100mm
- + Shaft for control knob D 8x6.5mm

Description	Thermocouple Connection	Part No.
25ST THERMOSTATIC GAS VALVE M9x1	M9x1mm	207022



PEL MAGNETIC UNITS

Description	Part No.
MAGNETIC UNIT SMALL HEAD/SMALL BODY	207026
MAGNETIC UNIT SMALL HEAD/LARGE BODY	207027
MAGNETIC UNIT LARGE HEAD/LARGE BODY	207028



MINISIT VALVE - HOTCUPBOARD

- + Temperature range 40-110°C
- + Inlet $\phi 1/2"$ F, outlet $\phi 3/8"$ F
- + Maximum inlet pressure 50 mbar
- + Capillary length 1050mm with bulb $\phi 5 \times 125$ mm

Description	Part No.
MINISIT VALVE - HOTCUPBOARD	0.710.817



MINISIT VALVE - FRYERS

- + Maximum inlet pressure 50 mbar
- + Capillary length 1050mm with bulb $\phi 6 \times 105$ mm

Description	Temperature Range	Inlet	Outlet	Part No.
MINISIT VALVE - FRYERS	110-190°C	$\phi 1/2"$ F	$\phi 3/8"$ F	0.710.756
MINISIT VALVE - FRYERS	120-200°C	$\phi 3/8"$ F	$\phi 3/8"$ F with elbow flanges	0.710.743



MINISIT VALVE - OVENS


- + Temperature range 100-340°C
- + Inlet $\phi 1/2"$ F, outlet $\phi 3/8"$ F
- + Maximum inlet pressure 50 mbar
- + Outlet pressure 3-18 mbar
- + Capillary length 1050mm with bulb $\phi 5 \times 68$ mm

Description	Part No.
MINISIT VALVE - OVENS	0.710.650



EUROSIT 630 GAS VALVE

- + Inlet $\varnothing 3/8"$ F, outlet $\varnothing 3/8"$ F
- + Maximum inlet pressure 50 mbar
- + Outlet pressure 3-18 mbar (with pressure governor)
- + Thermocouple Connection - M9x1



Description	Bulb	Capillary Length	Part No.
EUROSIT GAS VALVE 100-340°C	$\varnothing 4 \times 72$ mm	1050mm	0.630.331
EUROSIT GAS VALVE 110-190°C	$\varnothing 4 \times 202$ mm	1050mm	0.630.332

ELETTROSIT 810 GAS VALVE

- + Inlet $\varnothing 1/2"$ F, outlet $\varnothing 1/2"$ F
- + Maximum inlet pressure 50 mbar
- + Outlet pressure 3-18 mbar
- + Power supply 230V 50Hz
- + Pilot connection M10x1 bottom



Description	Part No.	Trade Price
ELETTROSIT 810 GAS VALVE	0.810.156	£219.20

SIT NOVA 820 GAS VALVE

- + Inlet $\varnothing 1/2"$ F, outlet $\varnothing 1/2"$ F
- + Maximum inlet pressure 60 mbar
- + Thermocouple connection M9x1



Description	Power Supply	Outlet Pressure (with Pressure Governor)	Part No.
SIT NOVA 820 GAS VALVE	240V 50Hz	3-30 mbar	0.820.012
SIT NOVA 820 GAS VALVE	220/240V 50Hz	5-50 mbar	0.820.031
SIT NOVA 820 GAS VALVE	Millivoltage version	5-50 mbar	0.820.301
SIT NOVA 820 GAS VALVE	Millivoltage version	3-30 mbar	0.820.303

BLACK TEKNIGAS FLAME FAILURE DEVICE

Description	Part No.
FLAME FAILURE DEVICE	G840HG



KNOB FOR MINISIT VALVES

Description	Part No.
KNOB FOR MINISIT 1-8	0.916.124
KNOB FOR MINISIT OFF-HOT	0.916.095



KNOB FOR ROBERTSHAW VALVES

Description	Part No.
ON/OFF/PILOT CONTROL KNOB	82220



MAXITROL RV48 GAS GOVERNORS

- + Inlet pressure: 100 mbar
- + Outlet pressure: 2.5 to 30 mbar

Description	Part No.
GAS GOVERNOR - 1/2"	207002
GAS GOVERNOR - 3/4"	207003



JEAVONS J78R GAS GOVERNORS

- + Inlet pressure: 350 mbar
- + Outlet pressure: 2 to 48 mbar

Description	Part No.
JEAVONS J78R GAS GOVERNOR - 1/2"	207004
JEAVONS J78R GAS GOVERNOR - 3/4"	207005
JEAVONS J78R GAS GOVERNOR - 1"	207006



HONEYWELL GAS SOLENOID VALVES

Description	Part No.
1/2" GAS SOLENOID VALVE 230V	205001
3/4" GAS SOLENOID VALVE 230V	205002
1" GAS SOLENOID VALVE 230V	205003
1-1/4" GAS SOLENOID VALVE 230V	205004
1-1/2" GAS SOLENOID VALVE 230V	205005
2" GAS SOLENOID VALVE 230V	205006



GAS LEVER BALL VALVES

Manufactured to EN 331:1998 with brass body, plated finish, and yellow plastic coated handle. Maximum operating pressure 5 bar and temperature range -20 to 60°C.



Description	Part No.
15mm COMPRESSION GAS LEVER VALVE	207051
22mm COMPRESSION GAS LEVER VALVE	207052
1/2" BSP TAPER FEMALE/FEMALE LEVER VALVE	207056
3/4" BSP TAPER FEMALE/FEMALE LEVER VALVE	207057

DORMONT GAS HOSES

Dormont
by MECHLINE

Dormont is the trusted name for reliable, high quality gas hoses. Each hose is constructed from fully annealed 304 stainless steel and features a helical corrugation design that increases strength and flexibility. The dipped PVC coating provides a permanent, wrinkle free, heat and crack resistant smooth surface preventing places where dirt and debris can lodge facilitating cleaning and better hygiene


Braided hoses have the quality construction of the standard hose with an added layer of stainless steel braiding that prevents the corrugations from stretching when a piece of equipment is moved. This increases the durability and service life of the hose. The braiding, along with the antimicrobial PVC coating process, creates an exceptionally strong protective surface.

Description	Part No.
DORMONT UNBRAIDED GAS HOSE 1/2" 1000mm	2650NPVF36
DORMONT UNBRAIDED GAS HOSE 1/2" 1200mm	2650NPVF48
DORMONT UNBRAIDED GAS HOSE 1/2" 1500mm	2650NPVF60
DORMONT BRAIDED GAS HOSE 1/2" 1000mm	2650BPQ36
DORMONT BRAIDED GAS HOSE 1/2" 1200mm	2650BPQ48
DORMONT BRAIDED GAS HOSE 1/2" 1500mm	2650BPQ60
DORMONT UNBRAIDED GAS HOSE 3/4" 1000mm	2675NPVF36
DORMONT UNBRAIDED GAS HOSE 3/4" 1200mm	2675NPVF48
DORMONT UNBRAIDED GAS HOSE 3/4" 1500mm	2675NPVF60
DORMONT BRAIDED GAS HOSE 3/4" 1000mm	2675BPQ36
DORMONT BRAIDED GAS HOSE 3/4" 1200mm	2675BPQ48
DORMONT BRAIDED GAS HOSE 3/4" 1500mm	2675BPQ60
DORMONT UNBRAIDED GAS HOSE 1" 1000mm	26100NPVF36
DORMONT UNBRAIDED GAS HOSE 1" 1200mm	26100NPVF48
DORMONT UNBRAIDED GAS HOSE 1" 1500mm	26100NPVF60
DORMONT BRAIDED GAS HOSE 1" 1000mm	26100BPQ36
DORMONT UNBRAIDED GAS HOSE 1 1/4" 1200mm	26125NPVF48
DORMONT UNBRAIDED GAS HOSE 1 1/4" 1500mm	26125NPVF60



CATERQUIP GAS HOSES

Fully welded corrugated stainless steel catering gas hose assemblies produced to a high specification in order to meet the legal requirements of gas supply for catering appliances using first, second and third family gases. The hoses come with a stainless steel nipple and quick-release valved coupler which cuts off the gas supply when disconnected together with a restraining device and M6 wall bolt which meets the tensile load specification as required by BS 669 Part:2 1997. The braided gas hoses have stainless steel 304L wire overbraiding for heavy duty applications.



Description	Part No.
UNBRAIDED 1/2" X 1000mm	211030
UNBRAIDED 1/2" X 1250mm	211043
UNBRAIDED 1/2" X 1500mm	211031
UNBRAIDED 3/4" X 1000mm	211032
UNBRAIDED 3/4" X 1250mm	211044
UNBRAIDED 3/4" X 1500mm	211033
UNBRAIDED 1" X 1000mm	211034
UNBRAIDED 1" X 1500mm	211035
BRAIDED 1/2" X 1000mm	211036
BRAIDED 1/2" X 1500mm	211037
BRAIDED 3/4" X 1000mm	211038
BRAIDED 3/4" X 1500mm	211039

Description	Part No.
RESTRAINING KIT FOR 1000mm HOSE	211041
RESTRAINING KIT FOR 1500mm HOSE	211042

BRASS REDUCING BUSH

Description	Part No.
1" BSP x 3/4" BSP BRASS REDUCING BUSH	209095



GAS TEST NIPPLE

For Natural Gas and LPG

Description	Part No.
TEST NIPPLE 1/8" BSP	209091



BLACK GAS PIPE FITTINGS

Description	Part No.
1/2" X 6" EXTENDED NIPPLE MALE/MALE EQUAL	209100
3/4" X 6" EXTENDED NIPPLE MALE/MALE EQUAL	209101
1/2" X 12" EXTENDED NIPPLE MALE/MALE EQUAL	209102
3/4" X 12" EXTENDED NIPPLE MALE/MALE EQUAL	209103
Description	Part No.
1/2" BLACK TEE FEMALE/FEMALE EQUAL	209104
3/4" BLACK TEE FEMALE/FEMALE EQUAL	209105
1/2" BLACK ELBOW 90° MALE/FEMALE EQUAL	209106
3/4" BLACK ELBOW 90° MALE/FEMALE EQUAL	209107
1/2" BLACK ELBOW 90° FEMALE/FEMALE EQUAL	209108
3/4" BLACK ELBOW 90° FEMALE/FEMALE EQUAL	209109
Description	Part No.
1/2" BLACK NIPPLE MALE/MALE EQUAL	209110
3/4" BLACK NIPPLE MALE/MALE EQUAL	209111
1/2" BLACK HEXAGONAL NIPPLE MALE/MALE EQUAL	209112
3/4" BLACK HEXAGONAL NIPPLE MALE/MALE EQUAL	209113
1/2" BLACK SOCKET FEMALE/FEMALE EQUAL	209114
3/4" BLACK SOCKET FEMALE/FEMALE EQUAL	209115
Description	Part No.
1/2" BLACK MALE PLUG	209116
3/4" BLACK MALE PLUG	209117
1/2" BLACK FEMALE CAP	209118
3/4" BLACK FEMALE CAP	209119
Description	Part No.
1" BSP x 3/4" BSP BLACK IRON REDUCING BUSH	209120
3/4" BSP x 1/2" BSP BLACK IRON REDUCING BUSH	209126
1/2" BSP x 3/8" BSP BLACK IRON REDUCING BUSH	209125
Description	Part No.
1/2" BLACK IRON RING CLIP TAPPED M10	209121
3/4" BLACK IRON RING CLIP TAPPED M10	209122
Description	Part No.
M10 BACKPLATE	209123
Description	Part No.
M10 x 1000mm THREADED ROD	209124



LAVA ROCK

Description	Part No.
LAVA ROCK 5kg PACKET	050859



GAS THREAD SEALING TAPE

Complies with BS EN 751-3:1997 for Natural Gas and LPG.

Description	Part No.
GAS THREAD SEALING TAPE 12mm x 5m	501081



MOLYKOTE 1102 GAS COCK GREASE

Resistant to gaseous Natural Gas and LPG. Temperature Range: 0 to 160°C, briefly to 220°C.

Description	Part No.
MOLYKOTE 1102 GAS COCK GREASE 50g TUBE	501051



ROCOL GM23660 GAS TAP LUBRICANT

Good lubricating and sealing properties for high temperature applications up to 120°C. Meets the requirements of BS5494:1978, service No. 6 (30,000 operations).

Description	Part No.
ROCOL GM23660 GAS TAP LUBRICANT 50g TUBE	32020



ROCOL GAS SEALANT

A non-setting gas sealant for threaded connections on gas appliances. Applications include Natural Gas, propane, butane and town gas (not for LPG in liquid form). A low pressure sealant - maximum pressure 200 mbar (2.5 psi).

Description	Part No.
ROCOL GAS SEALANT 300g	28042



ROCOL GAS LEAK DETECTION SPRAY

To detect even small leaks in all positive pressure gas systems.

Description	Part No.
ROCOL GAS LEAK DETECTION SPRAY 300ml	32030



HAYES GAS LEAK DETECTOR SPRAY

Will locate the smallest leak in gas or pressurised air vessels.



Description	Part No.
HAYES GAS LEAK DETECTOR SPRAY 400ml	906801

GAS WARNING LABELS - UNSAFE APPLIANCE

Dimensions - 64mm x 102mm.



Description	Part No.
GAS WARNING LABEL - tie-on label	907001
GAS WARNING LABEL - adhesive sticker	907002

DANGER - DO NOT USE LABELS

Labels that can be used as a self-adhesive sticker or as a tie on tag. Come in packs of 8 and are supplied with cable ties. Dimensions - 120mm x 100mm.



Description	Part No.
DANGER - DO NOT USE LABEL	907010

DANGER DO NOT USE WARNING NOTICE PAD

50 three part certificates per pad. Double cover with writing guard.



Description	Part No.
DANGER DO NOT USE WARNING NOTICE PAD	908001

GAS PIPE IDENTIFICATION TAPE

50mm wide x 33m long.



Description	Part No.
GAS PIPE IDENTIFICATION TAPE	906900
LPG PIPE IDENTIFICATION TAPE	906901

SEE PAGE 104 FOR MORE INFORMATION ON OUR GAS SAFE KIT

INSULATED CRIMP TERMINALS

Supplied in packs of 100.


Description	Size	Cable	Part No.
RED 18A FORK TERMINALS	4mm	0.5-1.5mm ²	102007
RED 18A FORK TERMINALS	5mm	0.5-1.5mm ²	102008
RED 18A FORK TERMINALS	6mm	0.5-1.5mm ²	102009
BLUE 24A FORK TERMINALS	4mm	1.5-2.5mm ²	102010
BLUE 24A FORK TERMINALS	5mm	1.5-2.5mm ²	102011
BLUE 24A FORK TERMINALS	6mm	1.5-2.5mm ²	102012
YELLOW 36A FORK TERMINALS	4mm	2.5-6mm ²	102013
YELLOW 36A FORK TERMINALS	5mm	2.5-6mm ²	102014
YELLOW 36A FORK TERMINALS	6mm	2.5-6mm ²	102015



Description	Size	Cable	Part No.
RED 19A RING TERMINALS	3.5mm	0.5-1.5mm ²	102038
RED 19A RING TERMINALS	4mm	0.5-1.5mm ²	102039
RED 19A RING TERMINALS	5mm	0.5-1.5mm ²	102040
RED 19A RING TERMINALS	6mm	0.5-1.5mm ²	102041
BLUE 27A RING TERMINALS	4mm	1.5-2.5mm ²	102042
BLUE 27A RING TERMINALS	5mm	1.5-2.5mm ²	102043
BLUE 27A RING TERMINALS	6mm	1.5-2.5mm ²	102044
YELLOW 48A RING TERMINALS	4mm	2.5-6mm ²	102045
YELLOW 48A RING TERMINALS	5mm	2.5-6mm ²	102046
YELLOW 48A RING TERMINALS	6mm	2.5-6mm ²	102047



Description	Size	Cable	Part No.
RED 12A F SPADE TERMINALS	2.8mm	0.5-1.5mm ²	102025
RED 12A F SPADE TERMINALS	4.8mm	0.5-1.5mm ²	102026
RED 12A F SPADE TERMINALS	6.3mm	0.5-1.5mm ²	102027
BLUE 16A F SPADE TERMINALS	6.3mm	1.5-2.5mm ²	102028
YELLOW 20A F SPADE TERMINALS	6.3mm	2.5-6mm ²	102029
RED 12A M SPADE TERMINALS	6.3mm	0.5-1.5mm ²	102032
BLUE 16A M SPADE TERMINALS	6.3mm	1.5-2.5mm ²	102033
YELLOW 20A M SPADE TERMINALS	6.3mm	2.5-6mm ²	102034



Description	Size	Cable	Part No.
RED 10A PIGGYBACK TERMINALS	6.3mm	0.5-1.5mm ²	102030
BLUE 15A PIGGYBACK TERMINALS	6.3mm	1.5-2.5mm ²	102031
RED BUTT SPLICE	1.7mm	0.5-1.5mm ²	102035
BLUE BUTT SPLICE	2.3mm	1.5-2.5mm ²	102036
YELLOW BUTT SPLICE	3.4mm	2.5-6mm ²	102037



HIGH TEMPERATURE TERMINALS

Nickel plated for temperatures up to 500°C and supplied in packs of 100.

Description	Size	Cable	Part No.
SPADE TERMINAL PACK	6.3mm	1-2.5mm	102061
Description	Size	Cable	Part No.
PIGGYBACK TERMINAL PACK	6.3mm	1-2.5mm	102065
Description	Size	Cable	Part No.
RING TERMINAL PACK	4mm	0.5-1mm	102070
RING TERMINAL PACK	4mm	1-2.5mm	102071
RING TERMINAL PACK	5mm	1-2.5mm	102072
RING TERMINAL PACK	6mm	1-2.5mm	102073
Description	Size	Cable	Part No.
TERMINAL COVER (supplied single)	6.3mm	n/a	102075



CRIMPING TERMINAL ASSORTMENT

Contents 150 terminals (approx):

- + 10 each of RV1.25-4, RF2-5, RV1.25-5, SV1.25-35, SV1.25-5, BV1.25, RV2-3.5, RV2-4, RV2-5, SV2-4 and BV2
- + 7 each of SV2-5, FDD1.25-7A, MDD1.25-250, FDD2-250A and MDD1.25-250
- + 5 each of RV5.5-5, RV5.5-6 and BV5.5

Description	Part No.
150 PIECE CRIMPING TERMINAL KIT	18160



100 PIECE CRIMPING TOOL/TERMINAL KIT

Crimping/wire stripping tool supplied with an assortment of approx 60 insulated and 40 non insulated crimp terminals:

- + Insulated terminals size: 0.5-1.0mm² (red), 1.5-2.5mm² (blue) and 4.0-6.0mm² (yellow)
- + Non-insulated terminals size: 1.5mm², 2.5mm², 4.0mm² and 6.0mm²

Description	Part No.
100 PIECE CRIMPING TOOL/TERMINAL KIT	13658



Compartment Organisers available on page 96

590 PIECE CRIMPING TOOL/TERMINAL KIT

Ratchet Crimping tool supplied with a wide assortment of approx 590 insulated crimp terminals:

- + Insulated terminals size: 0.5-1.0mm² (red), 1.5-2.5mm² (blue) and 4.0-6.0mm² (yellow)



Description	Part No.
590 PIECE CRIMPING TOOL/TERMINAL KIT	56383

QUICK CHANGE RATCHET ACTION CRIMPING TOOL

Ratcheting crimpers. Fitted with ergonomic handles, which accommodate either single or double handed operation. The incorporated ratchet mechanism is designed to reduce the amount of pressure required for completing a crimp, which increases comfort and reduces the risk of repetitive strain injuries.

Manufactured from carbon steel and supplied with two sets of swappable jaws, suitable for crimping the following insulated terminals:- red channel: 0.5-1.00mm², blue channel: 1.5-2.5mm² and yellow channel: 4.0-6.0mm², and non-insulated crimps 1.5, 2.5, 6 and 10mm.



Description	Part No.
RATCHET ACTION CRIMPING TOOL (220mm)	64336

4 WAY CRIMPING TOOL


Heavy gauge carbon steel hardened, tempered and chemically blacked. Moulded grip handles. Can crimp terminals, shear bolts, cut and strip wires.



Description	Part No.
4 WAY CRIMPING TOOL	13657

TERMINAL BLOCKS

Suitable for temperatures up to 150°C and nominal voltage of 450V.




Description	Contact Rating	Cable Cross Section	Part No.
3-WAY TERMINAL BLOCK	30A	6mm ²	102095
6-WAY TERMINAL BLOCK	30A	6mm ²	102096

CERAMIC TERMINAL BLOCKS

Suitable for temperatures up to 300°C and nominal voltage of 450V.

Description	Contact Rating	Cable Cross Section	Part No.
1-WAY TERMINAL BLOCK	30A	6mm ²	102080



Description	Contact Rating	Cable Cross Section	Part No.
2-WAY TERMINAL BLOCK	15A	2.5mm ²	102081
2-WAY TERMINAL BLOCK	30A	6mm ²	102082
2-WAY TERMINAL BLOCK	32A	4mm ²	102086
2-WAY TERMINAL BLOCK	57A	10mm ²	102087
2-WAY TERMINAL BLOCK	76A	16mm ²	102088



Description	Contact Rating	Cable Cross Section	Part No.
3-WAY TERMINAL BLOCK	15A	2.5mm ²	102083
3-WAY TERMINAL BLOCK	30A	6mm ²	102084
3-WAY TERMINAL BLOCK	32A	4mm ²	102089
3-WAY TERMINAL BLOCK	57A	10mm ²	102090
3-WAY TERMINAL BLOCK	76A	16mm ²	102091



Description	Contact Rating	Cable Cross Section	Part No.
4-WAY TERMINAL BLOCK	15A	2.5mm ²	102085



CABLE GLANDS

IP68 rated cable glands with back nut.

Description	Cable dia range	Sale quantity	Part No.
M20 X 1.5mm CABLE GLAND GREY	6-12mm	1	104001
M20 X 1.5mm CABLE GLAND BLACK	6-12mm	1	104002
M20 X 1.5mm CABLE GLAND BLACK	10-14mm	1	104003
M20 X 1.5mm CABLE GLAND BLACK	10-14mm	5	104004



Compartment Organisers available on page 96

DRAPER INSULATING TAPE

Description	Sale quantity	Part No.
10m X 19mm MIXED COLOURS INSULATION TAPE	8	68157
20m ROLL YELLOW/GREEN INSULATION TAPE	1	65348
20m ROLL BLACK INSULATION TAPE	1	11909
10m ROLL BLACK INSULATION TAPE	1	11910-1
10m ROLL BLACK INSULATION TAPE	8	11910
10m ROLL RED INSULATION TAPE	1	11912/1
10m ROLL RED INSULATION TAPE	8	11912
10m ROLL BLUE INSULATION TAPE	1	11915/1
10m ROLL BLUE INSULATION TAPE	8	11915



DRAPER CABLE TIES

Each pack contains an assortment of sizes.

Description	Part No.
75 PIECE CABLE TIE PACK 100x2.5mm to 200x4.8mm	28886
200 PIECE CABLE TIE PACK 100x2.5mm	28887
200 PIECE CABLE TIE PACK 100x2.5mm to 190x2.5mm	28888



90°C HEAT RESISTANT 3 CORE CABLE

Twin and earth. BS 6500 PVC insulated and sheathed. Maximum temperature +90°C.

Description	Max Temperature	Sale quantity	Part No.
3 CORE WHITE CABLE 1.5mm ²	90°C	per meter	11536/1
3 CORE WHITE CABLE 1.5mm ²	90°C	4 meters	11536/4
3 CORE WHITE CABLE 1.5mm ²	90°C	50m roll	11536



85°C HEAT RESISTANT 5 CORE CABLE

BS 7919 Rubber insulated and sheathed. Maximum temperature +85°C.

Description	Max Temperature	Sale quantity	Part No.
5 CORE BLACK CABLE 2.5mm ²	85°C	per meter	103100
5 CORE BLACK CABLE 16mm ²	85°C	per meter	103101



600°C HIGH TEMPERATURE CABLE

Pure nickel strands double glass yarn lapped glass braided double silicone varnish. Temperature resistant to 600°C continuous, 750°C for short periods. Working voltage 250V at current rating. Conductor temperature of 180°C: 21A / 200°C: 22A / 250°C: 23A.



Description	Max Temp	Sale quantity	Part No.
HIGH TEMPERATURE CABLE 2.5mm ²	600°C	per meter	102001

250°C HIGH TEMPERATURE CABLE

High temperature resistant nickel plated wire for use at temperature range -60° to +250°C.



Description	Max Temp	Sale quantity	Part No.
HIGH TEMPERATURE CABLE 1.5mm ²	250°C	10m roll	103001
HIGH TEMPERATURE CABLE 2.5mm ²	250°C	10m roll	103002
HIGH TEMPERATURE CABLE 4.0mm ²	250°C	10m roll	103003

180°C HIGH TEMPERATURE CABLE

Glass braided silicone rubber for use at operating temperature range -50° to +180°C.

Description	Max Temp	Sale quantity	Part No.
YELLOW/GREEN HIGH TEMP CABLE 2.5mm ²	180°C	per meter	102004
WHITE HIGH TEMP CABLE 4mm ²	180°C	per meter	102006
BLUE HIGH TEMP CABLE 2.5mm ²	180°C	per meter	102003
BLUE HIGH TEMP CABLE 1.5mm ²	180°C	10m roll	102005
BLACK HIGH TEMP CABLE 2.5mm ²	180°C	10m roll	102002



90°C HEAT RESISTANT TRI-RATED CABLE

Copper stranded conductor covered with a PVC sheath. Maximum operating temperature 90°C (105°C for 15,000 hours) to BS6231. Meets requirements of BS6231 (UK).



Description	Max Temp	Sale quantity	Part No.
BLUE TRI-RATED CABLE 1.5mm ²	90°C	100m roll	103005
BROWN TRI-RATED CABLE 1.5mm ²	90°C	50m roll	103006
YELLOW/GREEN TRI-RATED CABLE 1mm ²	90°C	100m roll	103007

GLASS FIBRE CABLE SLEEVING

Maximum temperature +350°C.

Description	Max Temp	Sale Quantity	Part No.
CABLE SLEEVING DIA 6mm	350°C	10m roll	103021
CABLE SLEEVING DIA 8mm	350°C	10m roll	103022
CABLE SLEEVING DIA 10mm	350°C	10m roll	103023
CABLE SLEEVING DIA 12mm	350°C	10m roll	103024



SILICONE CABLE SLEEVING

Maximum temperature +280°C.

Description	Max Temp	Sale Quantity	Part No.
CABLE SLEEVING DIA 3mm	280°C	10m roll	103030
CABLE SLEEVING DIA 6mm	280°C	10m roll	103031
CABLE SLEEVING DIA 8mm	280°C	10m roll	103032
CABLE SLEEVING DIA 12mm	280°C	10m roll	103033
CABLE SLEEVING DIA 14mm	280°C	10m roll	103034



13A LEADS & FUSED PLUG TOPS

Description	Part No.
BLACK MOULDED 13AMP PLUG WITH 2m STRAIGHT LEAD	102049
BLACK MOULDED 13AMP PLUG WITH 1.5m COILED LEAD	102048
WHITE PLUG FITTED WITH 13A FUSE	105056
BLACK PLUG FITTED WITH 13A FUSE	105057
BLACK RUBBER PLUG FITTED WITH 13A FUSE	105058



COMMANDO PLUGS

IP44 rated industrial plugs.

Description	Part No.
16 AMP BLUE PLUG 3 PIN (2P + E)	105200
32 AMP BLUE PLUG 3 PIN (2P + E)	105203

Description	Part No.
16 AMP RED PLUG 5 PIN (3P + N + E)	105202
32 AMP RED PLUG 5 PIN (3P + N + E)	105201



6.3X25MM QUICK ACTING FUSES

Sold in packs of 10.

Description	Part No.	Trade Price
QUICK ACTING CARTRIDGE FUSE 3A 6.3 X 25mm	105061	£0.35
QUICK ACTING CARTRIDGE FUSE 5A 6.3 X 25mm	105062	£0.53
QUICK ACTING CARTRIDGE FUSE 10A 6.3 X 25mm	105063	£0.53
QUICK ACTING CARTRIDGE FUSE 13A 6.3 X 25mm	105064	£0.44



QUICK ACTING (F) HBC CERAMIC FUSE 5X20MM

Fast acting 5x20mm 4A fuse. Sold singularly.

Description	Part No.	Trade Price
QUICK ACTING CERAMIC 4A FUSE	105066	£0.40



6.3X32MM FUSES

Sold in packs of 10.

Description	Part No.	Trade Price
DELAY FUSE 6.3x32mm 250V 5A	105070	£1.90
DELAY FUSE 6.3x32mm 250V 10A	105071	£1.90
DELAY FUSE 6.3x32mm 250V 16A	105072	£1.90
FAST BLOW 6.3x32mm 250V 5A	105073	£3.33
FAST BLOW 6.3x32mm 250V 10A	105074	£3.33
FAST BLOW 6.3x32mm 250V 16A	105075	£3.33



MIX SIZE HBC/LBC FUSE KIT

Selection of 180 anti-surge (T) and fast blow (F) ceramic and glass fuses in sizes of 20mm, 1" and 1.25" contained in a moulded compartment storage box containing 10 of each fuse:


- + 20mm HBC fuses in ratings of 3.15A(T), 5A(T), 10A (T)
- + 20mm LBC fuses of 1A(T), 1A(F), 2A(F), 3A(F), 3.15A(F), 5A(T), 5A(F)
- + 1" HBC fuses of 2A(F), 3A(F), 5A(F), 10A(F), 13A(F)
- + 1.25" LBC fuses of 5A(F), 10A(F), 15A(F)

Description	Part No.	Trade Price
BOXED HBC/LBC FUSE KIT	105080	£62.16



ROCKER SWITCHES

Fits cut-out 30x22mm - 16(4)A 250V. Max temperature 120°C.
With indicator lamp.



Description	Switch Action	Contact Form	Indicator Lamp	Markings	Protective Cover	Part No.
AMBER 2 POLE MOMENTARY NO SWITCH 230V 16A	Momentary	DPST	Yes	None	No	121004
RED 2 POLE MOMENTARY NO SWITCH 2 WITH 0-I PRINT & LAMP	Momentary	DPST	Yes	O-I	No	121005
RED 2 POLE MOMENTARY NC SWITCH WITH LAMP & COVER	Momentary	DPST	Yes	O-I	Yes	121006
GREEN 2 POLE ON/OFF NO SWITCH WITH LAMP & COVER	Momentary	DPST	Yes	None	Yes	121007
GREEN 2 POLE ON/OFF NO SWITCH WITH COVER & LAMP	Latching	DPST	Yes	None	Yes	121008
AMBER 2 POLE ON/OFF NO SWITCH WITH COVER & LAMP	Latching	DPST	Yes	None	Yes	121009
GREEN 2 POLE ON/OFF NO SWITCH WITH 0-I PRINT & LAMP	Latching	DPST	Yes	O-I	No	121010
GREEN 2 POLE ON/OFF NO SWITCH WITH LAMP & NO PRINT	Latching	DPST	Yes	None	No	121011
RED 2 POLE ON/OFF NO SWITCH WITH 0-I PRINT & LAMP	Latching	DPST	Yes	O-I	No	121012
AMBER 2 POLE ON/OFF NO SWITCH WITH 0-I PRINT & LAMP	Latching	DPST	Yes	O-I	No	121013
WHITE 2 POLE ON/OFF NO SWITCH WITH 0-I PRINT & LAMP	Latching	DPST	Yes	O-I	No	121014
GREEN 2 POLE CHANGEOVER SWITCH WITH LAMP	Latching	DPDT	Yes	None	No	121015
RED 2 POLE CHANGEOVER SWITCH WITH LAMP	Latching	DPDT	Yes	None	No	121016

ONE POLE ROCKER SWITCHES

16(4)A 250V - maximum temperature 120°C.
Fits cut-out 30x11mm.

Description	Part No.
GREEN ONE POLE SWITCH	121017
RED ONE POLE SWITCH	121018
AMBER ONE POLE SWITCH	121019



ROUND LATCHING PUSH BUTTONS

Fits 25mm dia cut-out - 16A 250V - max ambient temperature 120°C. With indicator lamp.



Description	Part No.
RED 2 POLE ON/OFF LATCHING PUSH BUTTON	108011
GREEN 2 POLE ON/OFF LATCHING PUSH BUTTON	108012
BLUE 2 POLE ON/OFF NO LATCHING PUSH BUTTON	108015

FLOAT SWITCH

Supplied with 1300mm long lead



Description	Part No.
FLOAT SWITCH	121031

HORIZONTAL PPS H FLOAT SWITCH

Suitable for signal switching and for use with transistorised input/low power, suppressed coil miniature relays (available on page 39). 250V 0.6A at temperatures up to +120°C. Internal mounting fitted in a 16.5mm dia hole in the tank from the inside, and secured by a nylon nut on the outside. Thread size M16x2x19. Supplied with 1000mm long lead.



Description	Part No.
HORIZONTAL FLOAT SWITCH 250V 0.6A	121032

DPST TOGGLE SWITCH

- + Panel mounting with bush 0.468in dia
- + 15A 250V
- + Ambient temperature -20 to +55°C



Description	Part No.
DPST ON-OFF TOGGLE SWITCH	121023

SPDT-NO/NC ROLLER LEVER MICROSWITCH

Rated at 16 A at 250 V at operating temperature of -40°C to +150°C.



Description	Part No.
ROLLER LEVER MICROSWITCH 230V 16A	121021

EGO SELECTOR SWITCHES

- + Maximum temperature 150°C
- + D shaft \varnothing 6x4.6mm

Description	Part No.
SELECTOR SWITCH 0-1 POSITIONS 16A 250V	42.02900.014



Description	Part No.
SELECTOR SWITCH 0-6 POSITIONS 16A 250V	46.27266.813




Description	Part No.
SELECTOR SWITCH 0-6 POSITIONS 16A 250V/10A 400V	49.27215.746



EGO CONTROL THERMOSTAT 82-96°C

D shaft for control knob 6x4.6mm.


Description	Capillary	Bulb	Part No.
EGO SINGLE-PHASE THERMOSTAT 82-96°C	870mm	6x147mm	55.13212.370



EGO CONTROL THERMOSTAT 30-85°C


D shaft for control knob 6x4.6mm.

Description	Capillary	Bulb	Part No.
EGO SINGLE-PHASE THERMOSTAT 30-85°C	850mm	6x92mm	55.13012.400



EGO CONTROL THERMOSTAT 30-93°C


D shaft for control knob 6x4.6mm.



Description	Capillary	Bulb	Part No.
EGO SINGLE-PHASE THERMOSTAT 30-93°C	1170mm	6x100mm	55.13212.330

EGO CONTROL THERMOSTAT 30-110°C

D shaft for control knob 6x4.6mm.



55.18022.010




55.13624.010

Description	Capillary	Bulb	Part No.
EGO SINGLE-PHASE THERMOSTAT 30-110°C	850mm	6x138mm	55.19022.819
EGO SINGLE-PHASE THERMOSTAT 30-110°C	870mm	6x100mm	55.18022.010
EGO SINGLE-PHASE THERMOSTAT 30-110°C	870mm	6x113mm	55.13022.010
EGO SINGLE-PHASE THERMOSTAT 30-110°C	1170mm	6x113mm	55.13223.010
EGO SINGLE-PHASE THERMOSTAT 30-110°C	1470mm	6x112mm	55.13624.010
EGO SINGLE-PHASE THERMOSTAT 30-110°C	3190mm (300m insulated)	3.1x197mm	55.13229.030

EGO CONTROL THERMOSTATS 130-190°C

D shaft for control knob 6x4.6mm.



55.18032.020



55.17039.010




55.34032.300

Description	Capillary	Bulb	Part No.
EGO SINGLE-PHASE THERMOSTAT 130-190°C	870mm	6x117mm	55.13032.260
EGO SINGLE-PHASE THERMOSTAT 130-190°C	870mm	6x120mm	55.18032.020
EGO THREE-PHASE THERMOSTAT 130-190°C	880mm	6x220mm	55.34032.300
EGO SINGLE-PHASE THERMOSTAT 130-190°C	1250mm	6x120mm	55.17039.010

EGO CONTROL THERMOSTAT 40-260°C


D shaft for control knob 6x4.6mm.



Description	Capillary	Bulb	Part No.
EGO SINGLE-PHASE THERMOSTAT 40-260°C	1540mm	3x160mm	55.13059.170

EGO CONTROL THERMOSTAT 50-300°C


D shaft for control knob 6x4.6mm.



Description	Capillary	Bulb	Part No.
EGO SINGLE-PHASE THERMOSTAT 50-300°C	870mm	3x160mm	55.13069.500

EGO CONTROL THERMOSTAT 85-450°C

D shaft for control knob 6x4.6mm.

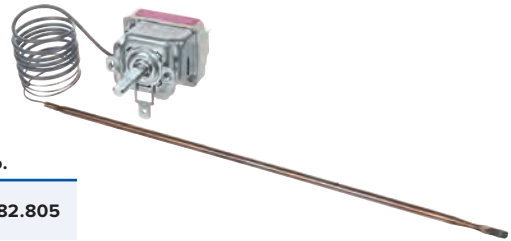


Description	Capillary	Bulb	Part No.
EGO SINGLE-PHASE THERMOSTAT 85-450°C	870mm	4x228mm	55.19082.805

EGO SAFETY THERMOSTAT 230°C


D shaft for control knob 6x4.6mm.



55.13549.010



55.13549.030



55.33542.090

Description	Capillary	Bulb	Part No.
EGO 1 POLE SAFETY THERMOSTAT 230°C	750mm	6x75mm	55.13549.010
EGO 1 POLE SAFETY THERMOSTAT 230°C	1050mm	6x96mm	55.13549.030
EGO 3 POLE SAFETY THERMOSTAT 230°C	700mm	6x78mm	56.10549.510
EGO 3 POLE SAFETY THERMOSTAT 230°C	870mm	6x110mm	55.33542.090
EGO 3 POLE SAFETY THERMOSTAT 230°C	1170mm (1060m insulated)	6x103mm	55.33543.030

ROBERTSHAW CONTROL THERMOSTATS

Description	Capillary	Bulb	Part No.
ROBERTSHAW CONTROL THERMOSTAT 374°F/190°C	36"	3/8" x 4"	RX-19-36
ROBERTSHAW CONTROL THERMOSTAT 374°F/190°C	36"	3/8" x 5-5/8"	RX-22-36
ROBERTSHAW CONTROL THERMOSTAT 400°F/204°C	36"	3/8" x 5"	RX-1-36



ROBERTSHAW SAFETY THERMOSTAT 450°F/232°C

Description	Capillary	Bulb	Part No.
ROBERTSHAW SAFETY THERMOSTAT 450°F/232°C	762mm	6.4x120mm	LCHM050300000



EGO THERMOSTAT GLANDS

Description	Part No.
THERMOSTAT GLAND M12 HOLE Ø 6mm	67.06100.100
THERMOSTAT GLAND Ø 9.5mm HOLE Ø 3/8"	67.00700.100



EGO THERMOSTAT CONTROL KNOBS

50mm diameter to fit D shaft size 6x4.6mm.

Description	Part No.
WHITE CONTROL KNOB MARKED ON/OFF/1-4/FULL	524.234
Description	Part No.
BLACK CONTROL KNOB MARKED WITH LINE	524.413
BLACK CONTROL KNOB MARKED 30-90°C	83.35601.010
BLACK CONTROL KNOB MARKED 30-110°C	524.407
BLACK CONTROL KNOB MARKED 50-300°C	524.403
BLACK CONTROL KNOB MARKED 50-250°C	524.404
BLACK CONTROL KNOB MARKED 30-110°C	524.805
Description	Part No.
BLACK CONTROL KNOB MARKED 0-1-2-3-4	524.059



UNIVERSAL CONTROL KNOBS

Description	D shaft size	Part No.
UNIVERSAL BLACK CONTROL KNOB 70mm DIAMETER	6x4.6mm	340001
UNIVERSAL BLACK CONTROL KNOB 70mm DIAMETER	8x6.5mm	340002
UNIVERSAL BLACK CONTROL KNOB 70mm DIAMETER	10x8mm	340003



Description	D shaft size	Part No.
SELF ADHESIVE DISC OFF-IGNITION-HIGH-LOW SYMBOLS	N/A	340010

ELECTRONIC SWITCHES & REGULATORS

For controlling heat lamps and conventional resistive heating elements in series or parallel configurations and some inductive loads, such as transformers/motors, designed to withstand 4 times start up current. Maximum operating temperature 65°C. Supplied with control knob and label. RoHS compliant directive 2002/95/EC.

Description	Load	Switch Type	Connection Type	Part No.
QLC FOUR POSITION ELECTRONIC SWITCH	15A	0-3 Positions	Cable	A11203E

Description	Load	Switch Type	Connection Type	Part No.
QVR/S ELECTRONIC ENERGY REGULATOR	15A	Variable	Cable	A13202E

Description	Load	Switch Type	Connection Type	Part No.
QVR/SFRI-17A ELECTRONIC ENERGY REGULATOR	17A	Variable	Cable	A13218E

Description	Load	Switch Type	Connection Type	Part No.
QVRS/TB ELECTRONIC ENERGY REGULATOR WITH RFI FILTER	10A	Variable	Terminal Block	A14232E



EGO SIMMERSTATS

Description	Part No.
EGO ENERGY REGULATOR 230V 13A 2 HOLE FIXING	50.87071.000
EGO ENERGY REGULATOR 230V 13A 4 HOLE AND CENTRE FIXING	50.59070.048
EGO ENERGY REGULATOR CENTRE FIXING	50.57076.070



ROBERTSHAW UNIVERSAL INFINITY SWITCHES

Universal replacement for infinite switches and heat switches. Maximum 13 Amps at 125°C with Wattage range of 100 Watts to 3600 Watts at 240 VAC. Supplied with fitting kit and adapters to allow original control knob to be used. Shaft can be cut to required length.

Description	Part No.
ROBERTSHAW UNIVERSAL INFINITE SWITCH	INF240597

Description	Part No.
ROBERTSHAW UNIVERSAL INFINITE SWITCH WITH KNOB	INF240597B




ROBERTSHAW INFINITY SWITCH

Description	Part No.
ROBERTSHAW 240V INFINITE HEAT SWITCH	INF240472



DIAMOND H SIMMERSTAT

Description	Part No.
SIMMERSTAT 13.5A 240V	41ER110B1



AEG CONTACTORS

Coil 230V 50Hz.



Description	Contacts		Part No.
	Main	Auxiliary (AC3 at 400V 9A 4kW)	
AEG CONTACTOR 4kW	3 Normally Open	1 Normally Closed	LS0501-50
AEG CONTACTOR 4kW	3 Normally Open	1 Normally Open	LS0510-50
AEG CONTACTOR 4kW	3 Normally Open	1 Normally Closed 10A	LS4K01-50
AEG CONTACTOR 4KW	3 Normally Open	1 Normally Closed 10A	LS4K10-50
AEG CONTACTOR 7.5KW	3 Normally Open	1 Normally Open 10A	LS7K01-50
AEG CONTACTOR 7.5KW	3 Normally Open	1 Normally Closed	LS7K10-50

Description	Contacts		Part No.
	Main	Auxiliary (AC3 at 400V 18A 7.5kW)	
AEG CONTACTOR 7.5KW	3 Normally Open	1 Normally Open auxiliary	LS7K400-50
AEG CONTACTOR 11KW	4 Normally Open	0 auxiliary	LS11K00-50

POWER RELAY

1 Normally Open contact 30A-250Vac.

Description	Part No.
POWER RELAY 230V 50/60HZ 30A	116051



RATIONAL SOLID STATE RELAY

OEM solid state relay for Rational combi ovens.


Description	Part No.
CELDUC SOB667330 SOLID STATE RELAY	40.00.453P



RECTANGULAR INDICATING LAMPS

Maximum temperature 125°C. Mounting size 22x30 mm.

Description	Part No.
GREEN INDICATING LAMP 230V	101201
RED INDICATING LAMP 230V	101202
AMBER INDICATING LAMP 230V	101203

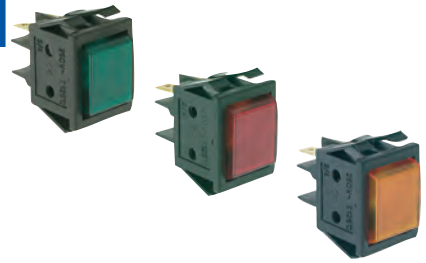

ROUND INDICATING LAMPS

13.5mm diameter to fit 10mm diameter hole.

Description	Part No.
GREEN INDICATING LAMP	101211
RED INDICATING LAMP	101212
AMBER INDICATING LAMP	101213



14mm overall dia to fit 10mm dia hole with chrome bezel and brass backnut.

Description	Part No.
GREEN INDICATING LAMP 230V	101226
RED INDICATING LAMP 230V	101227
AMBER INDICATING LAMP 230V	101228



14mm overall dia to fit 12mm dia hole.

Description	Part No.
GREEN INDICATING LAMP 230V	101216
RED INDICATING LAMP 230V	101217
AMBER INDICATING LAMP 230V	101218



15mm overall dia to fit 13mm dia hole.

Description	Part No.
GREEN INDICATING LAMP 230V	101221
RED INDICATING LAMP 230V	101222
AMBER INDICATING LAMP 230V	101223



SQUARE INDICATOR LIGHTS

16mm square to fit 12mm dia hole.

Description	Part No.
GREEN SQUARE INDICATING LAMP 220/380V	101206
RED SQUARE INDICATING LAMP 220/380V	101207
AMBER SQUARE INDICATING LAMP 220/380V	101208



OVEN LAMP & BULBS

Description	Part No.
42mm DIA OVEN LAMP ASSEMBLY (fits ø 38mm hole)	101251
72mm DIA OVEN LAMP ASSEMBLY (fits ø 68mm hole)	101250

Description	Part No.
42mm DIA OVEN LAMP GLASS	101252
57mm DIA OVEN LAMP GLASS	101253
73mm DIA OVEN LAMP GLASS	101254

Description	Part No.
15W 240V E14 OVEN LAMP MAX TEMPERATURE 300°C	101260
25W 240V E14 OVEN LAMP MAX TEMPERATURE 300°C	101261

Description	Part No.
25W 220V E14 OVEN BULB 300°C	101262
40W 230V E14 OVEN BULB 300°C	101263

Description	Part No.
25W 230V E27 OVEN BULB 300°C	101264

Description	Part No.
10W 12V G4 HALOGEN LAMP	101265
20W 12V G4 HALOGEN LAMP	101266



T5 FLUORESCENT TUBES

T5 (16mm dia) tubes provide a compact alternative to T8 tubes being up to 50% smaller and typically provide 5% more efficiency than comparable T8 lamps. Triphosphor tubes with very good lumen maintenance >90% throughout the life of the lamp.

Description	Part No.
14W T5 FLUORESCENT TUBE 549mm 4000K COOL WHITE	101371
21W T5 FLUORESCENT TUBE 849mm 4000K COOL WHITE	101372



PLUSLAMP UVA BLUE INSECT CONTROL LAMPS

Traditional blue 350mm UV lamps in both standard or shatter proof options.

Description	Part No.
25W TIGHTBEND BLUE PLUSLAMP	TVX25-TB
40W TIGHTBEND BLUE PLUSLAMP	TVX40-TB
SHATTERPROOF 25W TIGHTBEND BLUE PLUSLAMP	TVX25-TBS
SHATTERPROOF 40W TIGHTBEND BLUE PLUSLAMP	TVX40-TBS
Description	Part No.
22W CIRCLINE BLUE PLUSLAMP	TVX22
SHATTERPROOF 22W CIRCLINE BLUE PLUSLAMP	TVX22S
Description	Part No.
6 WATT 9" STRAIGHT BLUE UVA LAMP	TVX6-9
8 WATT 12" STRAIGHT BLUE UVA LAMP	TVX8-12
15 WATT 12" STRAIGHT BLUE UVA LAMP	TVX15-12
15 WATT 18" STRAIGHT BLUE UVA LAMP	TVX15-18
30 WATT 18" STRAIGHT BLUE UVA LAMP	TVX30-18
SHATTERPROOF 6 WATT 9" STRAIGHT BLUE UVA LAMP	TVX6-9S
SHATTERPROOF 8 WATT 12" STRAIGHT BLUE UVA LAMP	TVX8-12S
SHATTERPROOF 15 WATT 12" STRAIGHT BLUE UVA LAMP	TVX15-12S
SHATTERPROOF 15 WATT 18" STRAIGHT BLUE UVA LAMP	TVX15-18S



SYNERGETIC GREEN INSECT CONTROL LAMPS

Glowing green light to attract a wider range of insects than the traditional blue lamp.

Description	Part No.
11W COMPACT GREEN UV LAMP	TGX11
SHATTERPROOF 11W COMPACT GREEN UV LAMP	TGX11S
Description	Part No.
22W CIRCLINE GREEN UV LAMP	TGX22
SHATTERPROOF 22W CIRCLINE GREEN UV LAMP	TGX22S
Description	Part No.
15 WATT 18" STRAIGHT GREEN UV LAMP	TGX15-18
20 WATT 24" STRAIGHT GREEN UV LAMP	TGX20-24
SHATTERPROOF 15 WATT 18" STRAIGHT GREEN UV LAMP	TGX15-18S
SHATTERPROOF 20 WATT 24" STRAIGHT GREEN UV LAMP	TGX20-24S



LAMP STARTERS



Description	Part No.
PHILLIPS S2 TYPE STARTER 4-22W (suitable for all UVA lamps)	1800
2 PIN GLOW STARTER 4-80W (incorporates RF suppressor)	101378


120MM PUSH FIT HEAT LAMPS

Overall size 150 x 90mm for 120mm long lamps.

Description	Part No.
REFLECTOR	101008



Description	Part No.
REFLECTOR MESH	101199



Description	Part No.
LAMP HOLDER	101009



Description	Part No.
300W PHILIPS FOOD QUALITY LOW PRESSURE QUARTZ LAMP	101001



Description	Part No.
300W STD FOOD QUALITY LOW PRESSURE QUARTZ LAMP	101002



Description	Part No.
200W LOW PRESSURE QUARTZ LAMP JACKETED	101130
300W LOW PRESSURE QUARTZ LAMP JACKETED	101003
500W LOW PRESSURE QUARTZ LAMP JACKETED	101131



Description	Part No.
100W HIGH PRESSURE TUGSTEN LAMP STANDARD	101007
200W HIGH PRESSURE TUGSTEN LAMP STANDARD	101006
230W HIGH PRESSURE TUGSTEN LAMP STANDARD	101010
500W HIGH PRESSURE TUGSTEN LAMP STANDARD	101004



220MM PUSH FIT HEAT LAMPS

Description	Part No.
LAMP HOLDER FOR 220mm LONG PUSH FIT LAMPS	101119

Description	Part No.
300W JACKETED PUSH FIT IR QUARTZ LAMP	101118
500W JACKETED PUSH FIT IR QUARTZ LAMP	101117



350MM PUSH FIT HEAT LAMPS

Description	Part No.
LAMP HOLDER FOR 350mm LONG PUSH FIT LAMPS	101124

Description	Part No.
1000W JACKETED PUSH FIT IR QUARTZ LAMP	101123



220MM HEAT LAMPS WITH LEADS

Description	Part No.
LAMP HOLDER FOR 220mm LAMPS WITH LEADS	101116

Description	Part No.
300W IR QUARTZ LAMP WITH LEADS	101111
500W IR QUARTZ LAMP WITH LEADS	101110

Description	Part No.
200W JACKETED IR QUARTZ LAMP WITH LEADS	101114
300W JACKETED IR QUARTZ LAMP WITH LEADS	101113
500W JACKETED IR QUARTZ LAMP WITH LEADS	101112



350MM HEAT LAMPS WITH LEADS

Description	Part No.
LAMP HOLDER FOR 345mm LAMPS WITH LEADS	101122

Description	Part No.
1000W IR QUARTZ LAMP WITH LEADS	101120

Description	Part No.
1000W JACKETED IR QUARTZ LAMP WITH LEADS	101121



GANTRY HEAT LAMPS

Description	Part No.
COPPER FINISH SHADE & CERAMIC BULB HOLDER	101126
BRONZE FINISH SHADE & CERAMIC BULB HOLDER	101127

Description	Part No.
CERAMIC BULB HOLDER	101129

Description	Part No.
250W 240V EDISON SCREW IR QUARTZ BULB CLEAR	101132
300W 240V EDISON SCREW IR QUARTZ BULB CLEAR	101125
375W 240V EDISON SCREW IR QUARTZ BULB CLEAR	101135

Description	Part No.
250W 240V EDISON SCREW IR QUARTZ BULB RED	903003



HALOGEN LAMP HOLDER

Designed for use with a 1000W R7s tungsten halogen bulbs rated at 10A, 250V.


Description	Part No.
SCREW MOUNT (M3) HALOGEN LAMP HOLDER	101258



EGO RING HEATING ELEMENTS

Fixing hole centres 56mm.

Description	Outside Dia	Part No.
RING HEATING ELEMENT 1200W 230V	180mm	20.17983.040
RING HEATING ELEMENT 2400W 230V	190mm	20.23077.000
RING HEATING ELEMENT 2500W 230V	190mm	20.35390.010
RING HEATING ELEMENT 2500W 230V	190mm	20.17983.000
RING HEATING ELEMENT 2500W 230V	190mm	20.21693.000
RING HEATING ELEMENT 1800W 230V	200mm	20.28907.000
RING HEATING ELEMENT 2600W 230V	200mm	20.20219.050



EGO ELECTRIC ROUND HOTPLATES

Round EGO Hotplates that are available in a variety of sizes, wattages and voltages. Fitted with terminal block electric connections. Other voltages and wattages available on request.

Description	Part No.
ELECTRIC HOT PLATE 180mm 1500W 230V	12.18453.196
ELECTRIC HOT PLATE 180mm 2000W 230V	12.18463.194
ELECTRIC HOT PLATE 220mm 2600W 230V	12.22474.040




CERAMIC HEATING ELEMENT

Description	Part No.
CERAMIC HEATING ELEMENT 1000W 230V 245mm	122020



SINK/WATER BOILER HEATING ELEMENT

Description	Part No.
3KW HEATING ELEMENT FOR SINK	122030



FAN MOTOR ASSEMBLIES

Fan motor assemblies for ovens and hotcupboards with 150mm dia fan blades. 230V 50/60Hz.

Description	Part No.
150mm FAN MOTOR ASSEMBLY ROUND MOUNT 22/26W	111046



Description	Part No.
150mm FAN MOTOR ASSEMBLY ROUND MOUNT 45W	111024



Description	Part No.
150mm FAN MOTOR ASSEMBLY TRIANGULAR MOUNT 32W	111047



TANGENTIAL FANS

Description	Part No.
120X60MM TANGENTIAL FAN 25W 230V 50HZ RH MOTOR	111040
120X60MM TANGENTIAL FAN 25W 230V 50HZ LH MOTOR	111041
240X60MM TANGENTIAL FAN 25W 230V 50HZ RH MOTOR	111042
240X60MM TANGENTIAL FAN 25W 230V 50HZ LH MOTOR	111043
300X60MM TANGENTIAL FAN 26W 230V 50HZ RH MOTOR	111044
300X60MM TANGENTIAL FAN 26W 230V 50HZ LH MOTOR	111045



UNIVERSAL AXIAL FANS

Manufactured in reinforced plastic so are light weight and low noise. Suitable for use at ambient operating temperature of -20°C to +60°C. Three models are fitted with a trailing lead, but model FM-A-12038-T has a terminal block.

Description	Air flow	Part No.
80X80X38MM AXIAL FAN (WITH CABLE) 15W	40m ³ /h	FM-A-8038-L
120X120X25MM AXIAL FAN (WITH CABLE) 13W	71m ³ /h	FM-A-12025-L
120X120X38MM AXIAL FAN (WITH CABLE) 20W	132m ³ /h	FM-A-12038-L
120X120X38MM AXIAL FAN (TERMINAL) 20W	132m ³ /h	FM-A-12038-T



CABLE FOR AXIAL FANS

600mm cable with plug for axial fans with terminals.

Description	Part No.
600M CABLE FOR AXIAL FANS	LZ120



ELCO MULTIFIT TYPE N FAN MOTORS

Shaded pole motors with insulation class B and up to IP44 protection. Self lubricating and self aligning bearings. Suitable for horizontal or vertical mounting - motors can be fixed using the protruding screws for ring or grid, by the 3 threaded holes on back shield, or using the bottom screws. For use in ambient temperatures between -40°C to +40°C and fitted with a 500mm lead. Drive shaft fitted with white four pin fan hub suitable for standard fan blades.



SINGLE PART

10 PACK

Description	Part No.	Part No.
ELCO 5 WATT MULTIFIT FAN MOTOR	5WMULTIFIT	5WMULTIFIT-10
ELCO 7 WATT MULTIFIT FAN MOTOR	7WMULTIFIT	-
ELCO 10 WATT MULTIFIT FAN MOTOR	10WMULTIFIT	10WMULTIFIT-10
ELCO 16 WATT MULTIFIT FAN MOTOR	16WMULTIFIT	16WMULTIFIT-10
ELCO 18 WATT MULTIFIT FAN MOTOR	18WMULTIFIT	18WMULTIFIT-10
ELCO 25 WATT MULTIFIT FAN MOTOR	25WMULTIFIT	25WMULTIFIT-10
ELCO 34 WATT MULTIFIT FAN MOTOR	34WMULTIFIT	-

MOTOR MOUNTING BRACKETS

Description	Slot Centres	Part No.
MOTOR MOUNTING BRACKET 39mm	111048	£0.64
MOTOR MOUNTING BRACKET 56mm	111049	£0.71
MOTOR MOUNTING BRACKET 72mm	111050	£0.71
MOTOR MOUNTING BRACKET 84mm	111051	£0.79
MOTOR MOUNTING BRACKET 110mm	111052	£2.65



ELCO ALUMINIUM FAN BLADES

Description	Part No.
SUCTION FAN BLADE 154mm DIA x 31°	4012004
SUCTION FAN BLADE 200mm DIA x 31°	4012011
SUCTION FAN BLADE 254mm DIA x 31°	4012016



90° SOLENOID VALVES 230V 50HZ

Budget range of solenoid valves.

Description	Part No.
90° SINGLE SOLENOID VALVE 3/4"BSPx10mm	117011
90° SINGLE SOLENOID VALVE 3/4"BSPx14mm	117012

Description	Part No.
90° DOUBLE SOLENOID VALVE 3/4"BSPx10mm	117013
90° DOUBLE SOLENOID VALVE 3/4"BSPx14mm	117014

Description	Part No.
90° TRIPLE SOLENOID VALVE 3/4"BSPx10mm	117015
90° TRIPLE SOLENOID VALVE 3/4"BSPx13.5mm	117016



180° SOLENOID VALVES 230V 50HZ

Budget range of solenoid valves.

Description	Part No.
180° SINGLE SOLENOID VALVE 3/4"BSPx10mm	117017
180° SINGLE SOLENOID VALVE 3/4"BSPx14mm	117018

Description	Part No.
180° DOUBLE SOLENOID VALVE 3/4"BSPx10mm	117019
180° DOUBLE SOLENOID VALVE 3/4"BSPx14mm	117020

Description	Part No.
180° TRIPLE SOLENOID VALVE 3/4"BSPx10mm	117021



90° ELBI SOLENOID VALVES 230V 50HZ

High quality Elbi solenoid valves for use at a maximum temperature of 90°C.

Description	Part No.
90° ELBI SINGLE SOLENOID VALVE 3/4"BSPx10mm	117025
90° ELBI SINGLE SOLENOID VALVE 3/4"BSPx14mm	117026
Description	Part No.
90° ELBI DOUBLE SOLENOID VALVE 3/4"BSPx10mm	117027
90° ELBI DOUBLE SOLENOID VALVE 3/4"BSPx14mm	117028
Description	Part No.
90° ELBI TRIPLE SOLENOID VALVE 3/4"BSPx10mm	117029



180° ELBI SOLENOID VALVES 230V 50HZ

High quality Elbi solenoid valves for use at a maximum temperature of 90°C.

Description	Part No.
180° ELBI SINGLE SOLENOID VALVE 3/4"BSPx10mm	117030
180° ELBI SINGLE SOLENOID VALVE 3/4"BSPx14mm	117031
Description	Part No.
180° ELBI DOUBLE SOLENOID VALVE 3/4"BSPx10mm	117032
180° ELBI DOUBLE SOLENOID VALVE 3/4"BSPx14mm	117033
Description	Part No.
180° ELBI TRIPLE SOLENOID VALVE 3/4"BSPx10mm	117034



INLET PRESSURE REDUCER

Description	Part No.
INLET PRESSURE REDUCER 5.5 l/min	117081



OUTLET PRESSURE REDUCERS

Description	Part No.
OUTLET PRESSURE REDUCER 0.5 l/min	117082
OUTLET PRESSURE REDUCER 1.2 l/min	117083
OUTLET PRESSURE REDUCER 2.5 l/min	117084



UNIVERSAL DRAIN PUMP

220-240V 50Hz 30W pump supplied with 3 head bodies:

- + Head 1: inlet 22x25mm, outlet 22x35mm
- + Head 2: inlet 22x40mm, outlet 22x35mm
- + Head 3: inlet 30x30mm, outlet 22x35mm



Description	Part No.
UNIVERSAL DRAIN PUMP 230V	106001

DRAIN PUMP 40W 230V 50HZ

- + Inlet external ø 22mm
- + Outlet external ø 30mm



Description	Part No.
DRAIN PUMP 40W 230V	106002

DRAIN PUMP 40W 230V 50HZ

- + Inlet external ø 24mm
- + Outlet external ø 22mm



Description	Part No.
DRAIN PUMP 40W 230V	106003

UNIVERSAL RINSE BOOSTER PUMP

- + 0.10HP/0.075kW/1.1A /230V/50Hz
- + Inlet ø 28mm, outlet ø 28mm
- + Flow rate 80 l/min
- + Capacitor 5 µF



Description	Part No.
UNIVERSAL RINSE PUMP 230V	106051

CAPACITORS

Rated at 450V 50Hz for operating temperature range of -25 to +85°C.

Description	Part No.
CAPACITOR 2.5 µF	107001
CAPACITOR 3.15 µF	107002
CAPACITOR 4 µF	107003
CAPACITOR 5 µF	107004
CAPACITOR 6.3 µF	107005
CAPACITOR 8 µF	107006
CAPACITOR 10 µF	107007
CAPACITOR 12.5 µF	107008
CAPACITOR 14 µF	107009
CAPACITOR 16 µF	107010
CAPACITOR 18 µF	107011
CAPACITOR 20 µF	107012



SEKO NPG 0.4 RINSE AID PERISTALTIC PUMP

Designed for internal installation in a dishwasher only and supplied with full fitting kit

- + Electrical supply 230VAC 8W
- + Sekobril squeeze tube
- + 3 bar pressure
- + Fixed flow to dispense 0.7cc per revolution - 0.4 litre/hour



SINGLE PART

3 PACK

5 PACK

Description	Part No.	Part No.	Part No.
NPG 0.4 FIXED FLOW RINSE AID PUMP NPG030HA2000	106103	106113	106123

SEKO NBR 0.4 RINSE AID PERISTALTIC PUMP

Designed for internal installation in a dishwasher only and supplied with full fitting kit

- + Electrical supply 230VAC 8W
- + Sekobril squeeze tube
- + 3 bar pressure
- + Dispenses 0.7cc per revolution - 0.4 litre/hour



SINGLE PART

3 PACK

5 PACK

Description	Part No.	Part No.	Part No.
NBR 0.4 TIME ADJUSTABLE RINSE AID PUMP NBR030HA2000	106101	106111	106121

SEKO NPG 1.5/3 DETERGENT PERISTALTIC PUMP

Supplied with full fitting kit

- + Electrical supply 230VAC 8W
- + Santoprene squeeze tube
- + 0.1 bar pressure
- + NPG 1.5 dispenses 1.5cc per revolution - 1.8 litre/hour
- + NPG 3 dispenses 2.5cc per revolution - 3 litre/hour



Description	SINGLE PART	3 PACK	5 PACK
	Part No.	Part No.	Part No.
NPG 1.5 FIXED FLOW DETERGENT PUMP NPG001HA1000	106109	106119	106129
NPG 3 FIXED FLOW DETERGENT PUMP NPG0003A1000	106102	106112	106122

SEKO NBR 3 DETERGENT PERISTALTIC PUMP

Supplied with full fitting kit

- + Electrical supply 230VAC 8W
- + Santoprene squeeze tube
- + 0.1 bar pressure
- + Dispenses 2.5cc per revolution - 3 litre/hour



Description	SINGLE PART	3 PACK	5 PACK
	Part No.	Part No.	Part No.
NBR 3 TIME ADJUSTABLE DETERGENT PUMP NBR0003A1000	106100	106110	106120

DETERGENT/RINSE AID PUMP FITTINGS

Description	Part No.
PVC FEED TUBE 4x6mm 10 metres	106145
PVC FEED TUBE 5x8mm 10 metres	106146
FOOT FILTER with fitting for 4 x 6mm tube	9900106162
FOOT FILTER WITH NON RETURN VALVE	409010
6x10 SANTOPRENE DETERGENT SQUEEZE TUBE for 4x6mm tube	9900090057
6x10 SEKOBRIIL RINSE AID SQUEEZE TUBE for 4x6mm tube	9900090098
6x10 SEKOBRIIL RINSE AID SQUEEZE TUBE with 7mm nipples	9900090099
WASH TANK INLET FITTING	9900107047
TUBE HOLDER CONNECTOR KIT	9900107084
WASH TANK INLET FITTING 4 X 6MM TUBE	9900060344
STAINLESS STEEL NON-RETURN VALVE	9900071055
NON-RETURN VALVE ADAPTER (5PK)	9900107118



STAINLESS STEEL DRAIN TUNDISH

- + Suitable for combi oven drainage systems
- + Stainless steel construction with stainless steel outlet
- + Choice of 2" BSP threaded outlet or plain outlet with flexible coupling for 50mm pipework. Flexible coupling is also available separately
- + Dimensions 200(W)x110(D)x260(H)mm

Description	Part No.
STAINLESS STEEL DRAIN TUNDISH WITH FLEXIBLE CONNECTION	408001
<hr/>	
Description	Part No.
STAINLESS STEEL DRAIN TUNDISH WITH 2" BSP CONNECTION	408002
<hr/>	
Description	Part No.
48-56mm FLEXIBLE COUPLING (included with 408001)	PC56



HT-SYSTEM DISCHARGE PIPE & FITTINGS

50mm push-fit pipe and fittings suitable for combi oven drainage systems. Manufactured in polypropylene with low inflammability and hot water/chemical resistance. Meets requirements of DIN EN 1451-1, DIN 19560-10, DIN 4102 B1. Available as kits containing all parts required for the installation of a combi oven in most circumstances or as individual items.

Description	Part No.
COMBI DRAIN INSTALLATION KIT comprising of 50mm pipe and fittings suitable for all sizes of combi ovens (no water hose supplied)	8720.1031
COMBI SERVICE INSTALLATION KIT comprising of 2m long water hose with 50mm pipe and fittings suitable for all sizes of combi ovens	60.70.464

INDIVIDUAL ITEMS

Description	Part No.
50mm HT-SYSTEM PIPE 250mm	2070.0054
50mm HT-SYSTEM PIPE 500mm	2070.0052
50mm HT-SYSTEM 87° ELBOW	2070.0043
50mm HT-SYSTEM 45° ELBOW	2070.0047
50/50mm HT-SYSTEM TEE	2070.0048
50/50mm HT-SYSTEM DOUBLE SOCKET	2070.0051
40/50mm HT-SYSTEM REDUCER	50.01.967



60.70.464

WASTE KIT WITH STANDPIPE

Chrome plated brass 70mm waste kit with 300mm stainless steel and plastic stand pipe.



Description	Part No.
COMBINED SINK WASTE STANDPIPE/ STRAINER 300MM HEIGHT	VTE3018EURO

UNSLOTTED BASIN WASTE

1 1/4" BSP x 89mm length x 2 7/16" flange with plastic back nut, 12" No. 6 ball chain and stay.



Description	Part No.
UNSLOTTED BASIN WASTE	201289


DRAIN HOSES

Supplied with 'U' bracket for use with standpipes.

Description	Part No.
19x22mm CONNECTIONS x 1.6m LONG	404001
19x22mm CONNECTIONS x 2.5m LONG	404002
22x29mm CONNECTIONS x 1.6m LONG	404003
22x30mm CONNECTIONS x 2.5m LONG	404004
22x29mm CONNECTIONS x 3.6m LONG	404005



Description	Part No.
21mm 90° ANGLE CONNECTION x 1.6m LONG	404006
21mm 90° ANGLE CONNECTION x 2.5m LONG	404007



DISHWASHER CONNECTION HOSES

With straight/angled plastic fittings.



Description	Connection 1	Connection 2	Length	Bore	Part No.
RED INLET HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1500mm	10mm	Q16000
RED INLET HOSE	3/4" Female Straight	3/4" Female Elbow 90°	2500mm	10mm	Q16003



Description	Connection 1	Connection 2	Length	Bore	Part No.
BLUE INLET HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1500mm	10mm	WM15B
BLUE INLET HOSE	3/4" Female Straight	3/4" Female Elbow 90°	2500mm	10mm	WM25B




THE UK'S LARGEST STOCK OF OEM SPARES



THE LEADING SUPPLIER FOR ALL OEM MANUFACTURER PARTS & ACCESSORIES.

BRAIDED S/S TAP CONNECTION HOSES

WRAS approved hoses and stainless steel braiding for a water pressure up to 15 bar.



Description	Connection 1	Connection 2	Length	Bore	Part No.
PEX S/S BRAIDED TAP CONNECTION HOSE	1/2" Female Straight	15mm Compression	300mm	13mm	402014
PEX S/S BRAIDED TAP CONNECTION HOSE	1/2" Female Straight	15mm Compression	500mm	13mm	402015
EPDM S/S BRAIDED TAP CONNECTION HOSE	1/2" Female Straight	15mm Compression	300mm	10mm	TT01/300
EPDM S/S BRAIDED TAP CONNECTION HOSE	3/4" Female Straight	15mm Compression	300mm	10mm	TT13/300
EPDM S/S BRAIDED TAP CONNECTION HOSE	1/2" Female Straight	15mm Compression	500mm	10mm	Q10207
EPDM S/S BRAIDED TAP CONNECTION HOSE	3/4" Female Straight	15mm Compression	500mm	10mm	Q10214
EPDM S/S BRAIDED TAP CONNECTION HOSE	1/2" Female Straight	15mm Compression	300mm	10mm	TT02/300
EPDM S/S BRAIDED TAP CONNECTION HOSE	1/2" Female Straight	15mm Compression	500mm	10mm	TT02RW/500
EPDM S/S BRAIDED TAP CONNECTION HOSE	1/2" Female Straight	15mm Compression	300mm	12mm	TT25RW/300
EPDM S/S BRAIDED TAP CONNECTION HOSE	3/4" Female Straight	15mm Compression	500mm	12mm	TT27RW/500



Description	Connection 1	Connection 2	Length	Bore	Part No.
EPDM S/S BRAIDED TAP CONNECTION HOSE	10mm Short	15mm Compression	300mm	8mm	MONO10SWS
EPDM S/S BRAIDED TAP CONNECTION HOSE	10mm Long	15mm Compression	300mm	8mm	MONO10SWL

BRAIDED S/S CONNECTION HOSES



Description	Connection 1	Connection 2	Length	Bore	Part No.
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	1/2" Female Straight	1/2" Female Elbow 90°	1000mm	12mm	401021
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	1/2" Female Straight	1/2" Female Elbow 90°	1500mm	12mm	401023
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	1/2" Female Straight	1/2" Female Elbow 90°	2000mm	12mm	401024
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1000mm	10mm	401001
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1250mm	10mm	401002
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1500mm	10mm	401003
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	2000mm	10mm	401004
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1000mm	12mm	401005
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1250mm	12mm	401006
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1500mm	12mm	401007
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	2000mm	12mm	401008
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1000mm	19mm	401025
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1250mm	19mm	401026
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	1500mm	19mm	401027
EPDM S/S BRAIDED APPLIANCE CONNECTION HOSE	3/4" Female Straight	3/4" Female Elbow 90°	2000mm	19mm	401028

REPLACEMENT HOSE GASKET

EPDM Gasket suitable for 3/4" hoses.



Description	Part No.
FLAT EPDM GASKET ø 24x12x2 mm	409060

BRASS COMPRESSION PIPE FITTINGS

+ WRAS approved

Description	Part No.
15MM COMPRESSION STOP CAP	6732
22MM COMPRESSION STOP CAP	6733



Description	Part No.
15MM COMPRESSION COUPLER	17589
22MM COMPRESSION COUPLER	17590



Description	Part No.
ADAPTOR - 15MM COMPRESSION TO 1/2" BSP MALE	17633
ADAPTOR - 15MM COMPRESSION TO 3/4" BSP MALE	17634
ADAPTOR - 22MM COMPRESSION TO 3/4" BSP MALE	17636



Description	Part No.
EQUAL TEE 15MM	6738
EQUAL TEE 22MM	6739




Description	Part No.
15MM COMP X 1/2" BSP 90° ELBOW WALLPLATE	6046
22MM COMP X 3/4" BSP 90° ELBOW WALLPLATE	7305



WASHING MACHINE TAPS

Supplied with a red and a blue lever for hot or cold water supplies.

Description	Part No.
WASHING MACHINE TAP 15mm x 3/4" BSP	403151
WASHING MACHINE TAP WITH CHECK VALVE 15mm x 3/4" BSP	403152



Y PIECE CONNECTORS

Description	Part No.
PLASTIC 2 WAY Y CONNECTOR 3/4"F x 3/4"M x 3/4" M	409001
BRASS 2 WAY Y CONNECTOR 3/4"F x 3/4"M x 3/4" M	904015



T&S DRAIN VALVE SPARE PARTS

Description	Part No.
GASKET FOR 3 1/2" FACE FLANGE	010382-45



Description	Part No.
3 1/2" FLAT STRAINER; WASTE VALVE DRAIN	010386-45



Description	Part No.
WASTE VALVE PLUNGER	010388-45



Description	Part No.
O-RING FOR PLUNGER	010389-45



Description	Part No.
FERRULE FOR COUPLING NUT	010390-45



Description	Part No.
COUPLING NUT; WASTE VALVE	010391-45



Description	Part No.
OVERFLOW CAP INC. SEALING WASHER	012640-45



Description	Part No.
PARTS KIT FOR WASTE VALVE	B-39K



T&S PRE-RINSE SPARES

Suitable for T&S and other popular pre-rinse units.

Description	Part No.
STANDARD SPRAY VALVE 5.375 LITRES/MINUTE	UK-0107
Description	Part No.
LOW FLOW SPRAY VALVE 2.46 LITRES/MINUTE	EB-0107-C
Description	Part No.
SERVICE KIT FOR STANDARD SPRAY VALVE UK-0107	UK-10K
Description	Part No.
40" LONG HOSE FOR PRE-RINSE UNIT WITH HANDLE	UK-0040-H
37" LONG HOSE FOR PRE-RINSE UNIT WITHOUT HANDLE	UK-0037-H2A
Description	Part No.
GRIP HANDLE BLUE FOR PRE RINSE HOSE ASSEMBLY	011482-40
Description	Part No.
HOT CERAMIC CARTRIDGE ASSEMBLY	013787-45
COLD CERAMIC CARTRIDGE ASSEMBLY	013788-45
Description	Part No.
LEVER HANDLE KIT	E-HDL-L
Description	Part No.
SWIVEL NUT	013839-25
Description	Part No.
LOCK WASHER	014200-45
Description	Part No.
O-RING FOR POP & LOCK	001062-45
Description	Part No.
12" (305MM) WALL BRACKET	B-0109-03



T&S PRE-RINSE SPARES (CONT)

Description	Part No.
OVERHEAD SPRING	000888-45
Description	Part No.
SPRING HOLDER	000821-40
Description	Part No.
WASHER FOR SPRAY VALVE ASSEMBLY	010476-45
Description	Part No.
HOLD DOWN RING	000907-45
Description	Part No.
BLUE HANDLE FOR SPRAY VALVE ASSEMBLY	011454-45
Description	Part No.
NUT FOR SPRAY VALVE HANDLE	003198-45
Description	Part No.
SCREW FOR SPRAY VALVE HANDLE	003199-45
Description	Part No.
RING FOR SPRAYHEAD	011475-45
Description	Part No.
SPRAYFACE	017288-45
Description	Part No.
SCREW, SPRAYFACE	000913-45
Description	Part No.
ASSEMBLY, BONNET	002856-40



MECHLINE AQUAJET PRE-RINSE SPARE PARTS

Description	Part No.
COMPLETE PRE-RINSE SPRAY GUN ASSEMBLY STANDARD ROSE HEAD	AJSG019
COMPLETE PRE-RINSE SPRAY STANDARD GUN ASSEMBLY, C/W WATER SAVING FACE PLATE	AJSG019W
COMPLETE PRE-RINSE SPRAY GUN ASSEMBLY ANGLED ROSE HEAD	AJSG019A
COMPLETE PRE-RINSE SPRAY GUN ASSEMBLY FAN BLADE HEAD	AJSG019F
COMPLETE PRE-RINSE SPRAY GUN ASSEMBLY "ECO" WATER SAVING HEAD	AJSG019ECO



Description	Part No.
COMPLETE INNER & OUTER HOSE ASSEMBLY, C/W END FITTINGS	AJHA010
HOSE ASSEMBLY WASHER PACK (3 WASHERS)	AJWP015



Description	Part No.
FACEPLATE & SCREW	AJFP022
WATER SAVING FACE PLATE (FOR STANDARD ROSE HEAD & ANGLED ROSE HEAD GUNS ONLY)	AJFP022L



Description	Part No.
RUBBER RING	AJRR021



Description	Part No.
TRIGGER (INCLUDES SCREW)	AJGT023



Description	Part No.
SPRAY GUN VALVE REPAIR KIT	AJGRK041



Description	Part No.
SPRAY GUN VALVE SPRING ONLY	AJ-SPRING



Description	Part No.
1 VALVE BODY (FITS HOT ON LEVER HEAD BODY OR HOT & COLD ON CROSS HEAD BODY)	AJVCH028
1 VALVE BODY (FITS COLD ONLY) FOR LEVER HEAD BODY	AJVC029



MECHLINE AQUAJET PRE-RINSE SPARE PARTS (CONT)

Description	Part No.
VALVE BONNET & PACKING GLAND	AJBC047



Description	Part No.
PAIR (H&C) 63MM CHROME LEVER	AJLT026



Description	Part No.
2 RED, 2 BLUE INSERTS & 2 SCREWS	AJTD027



Description	Part No.
BOWL FILLER BODY	AJBF040



Description	Part No.
1 VALVE BODY (FOR BOWL FILLER ONLY)	AJVBF042



Description	Part No.
BOWL FILLER SPOUT 150MM (6-INCH)	AJRS031
BOWL FILLER SPOUT 300MM (12-INCH)	AJRS035



Description	Part No.
SPOUT O-RING PACK (2 X O-RINGS)	AJOP016



Description	Part No.
OUTER SUPPORT SPRING	AJOS009



Description	Part No.
WALL BRACKET (LENGTH: 300MM; DIA. 17.15MM)	AJWB017



CONTRACT TAPS

- + Chrome plated brass with brass backnut and 1/2" BSP inlets
- + WRAS approved



Description	Sale Quantity	Part No.
CROSS HEAD 1/2" MIXER TAP	1	403100

Description	Sale Quantity	Part No.
CROSS HEAD 1/2" SINK TAPS	1	403103

Description	Sale Quantity	Part No.
CROSS HEAD 1/2" BASIN TAPS	1	403102

Description	Sale Quantity	Part No.
CROSS HEAD 1/2" BIB TAPS	1	403101

Description	Sale Quantity	Part No.
LEVER ACTION 1/2" MIXER TAP	1	403115
LEVER ACTION 1/2" MIXER TAP	5	403115-5

Description	Sale Quantity	Part No.
LEVER ACTION 1/2" SINK TAPS	1	403111
LEVER ACTION 1/2" SINK TAPS	5	403111-5

Description	Sale Quantity	Part No.
LEVER ACTION 1/2" BASIN TAPS	1	403110
LEVER ACTION 1/2" BASIN TAPS	5	403110-5

REPLACEMENT CARTRIDGES FOR CONTRACT TAPS



Description	Part No.
PAIR OF REPLACEMENT CARTRIDGES FOR CROSS HEAD 1/2" BIB TAPS	SP005-095X
PAIR OF REPLACEMENT CARTRIDGES FOR CROSS HEAD 1/2" BASIN TAPS	SP005-181X
PAIR OF REPLACEMENT CARTRIDGES FOR CROSS HEAD 1/2" SINK TAPS	SP005-183X
PAIR OF REPLACEMENT CARTRIDGES FOR CROSS HEAD 1/2" MIXER TAP	SP005-187XBB
PAIR OF REPLACEMENT CARTRIDGES FOR LEVER ACTION TAPS	CDV001

TOMLINSON ES SERIES DRAW OFF TAPS

- + Chromed brass body with 1-1/32"-14 UNS threads and black nylon bonnet
- + Fits 1/2 NPS union nut or wing nut shanks
- + Flow rate 7.31 litres/min at a pressure of 14 psi / 0.93 bar

Description	Part No.
ES SERIES SELF CLOSING TAP KIT	1000484

Description	Part No.
ES SERIES UPPER TAP ASSEMBLY	1007754



TOMLINSON S SERIES DRAW OFF TAPS

- + Chromed brass body with 1-1/32"-14 UNS threads and metal threaded black nylon bonnet.
- + Fits 1/2 NPS union nut or wing nut shanks.
- + Flow rate 7.92 litres/min at a pressure of 14 psi / 0.93 bar

Description	Part No.
S SERIES SELF CLOSING TAP - BLACK	1000437

Description	Part No.
S SERIES UPPER TAP ASSEMBLY - BLACK	1001013
S SERIES UPPER TAP ASSEMBLY - BLUE	1012043



TOMLINSON DRAW OFF TAP PARTS

- + For S, S-1 and ES series draw off taps

Description	Part No.
SEAT CUP	1918304

Description	Part No.
STD SPRING	1902033
HD SPRING	1909491

Description	Part No.
HANDLE PIN	1902041



BRITA PURITY C WATER FILTERS

Replacement cartridges for Purity C water filter systems.



Description	Part No.
REPLACEMENT PURITY C50 CARTRIDGE 831 litres	1002730
REPLACEMENT PURITY C150 CARTRIDGE 2086 litres	102828
REPLACEMENT PURITY C300 CARTRIDGE 3464 litres	102826
REPLACEMENT PURITY C500 CARTRIDGE 5889 litres	1002045
REPLACEMENT PURITY C1100 CARTRIDGE 9960 litres	1012446

Purity C Filter Heads with 3/8" connections. Adapter can be used for 3/4" hose fittings.



Description	Part No.
PURITY FILTER HEAD WITH FIXED 30% BY-PASS	1002952



Description	Part No.
PURITY C HEAD WITH 0-70% VARIABLE BY-PASS	1013637

BRITA PURITY C STEAM WATER FILTERS

Provides a convenient method for flushing vending and coffee machines with cleaning fluids. The cartridge can be filled with cleaning fluid of choice and replaces any size PURITY C filter.



Description	Part No.
REPLACEMENT PURITY C STEAM C500 CARTRIDGE 4675 litres	1023320
REPLACEMENT PURITY C STEAM C1100 CARTRIDGE 7907 litres	1023328

Purity C Steam Filter Head with 3/8" connections. Adapter can be used for 3/4" hose fittings.



Description	Part No.
PURITY C STEAM FILTER HEAD WITH VARIABLE BY-PASS	1023325

PURITY C SERVICE CARTRIDGE

Provides a convenient method for flushing vending and coffee machines with cleaning fluids. The cartridge can be filled with cleaning fluid of choice and replaces any size PURITY C filter.



Description	Part No.
PURITY C SERVICE CARTRIDGE	1006579

BRITA PURITY WATER FILTER CARTRIDGES

Replacement Purity Quell ST filter cartridges.

Description	Part No.
REPLACEMENT ST450 CARTRIDGE 3807 litres	273000
REPLACEMENT ST600 CARTRIDGE 6337 litres	273200
REPLACEMENT ST1200 CARTRIDGE 11596 litres	273400



Replacement Purity Steam filter cartridges.

Description	Part No.
REPLACEMENT STEAM 600 CARTRIDGE 5771 litres	1000252
REPLACEMENT STEAM 1200 CARTRIDGE 10800 litres	1000231



Replacement Purity Clean filter cartridges.

Description	Part No.
REPLACEMENT CLEAN 1200 CARTRIDGE 5771 litres	1000252
REPLACEMENT CLEAN EXTRA 1200 CARTRIDGE 10800 litres	1000231



BRITA WATER FILTER ACCESSORIES

Description	Part No.
DIGITAL FLOWMETER	298900



Description	Part No.
INLINE ANALOGUE FLOWMETER	MAD200



Description	Part No.
REINFORCED FLEXIBLE HOSE 3/8" - 3/4" x 1500mm long	1007706



REINFORCED FLEXIBLE HOSE 3/8" - 3/8" x 1500mm long	1007714
--	---------

Description	Part No.
PURITY HOSE SET WITH SERVICE VALVE	1007734



Description	Part No.
INLET/OUTLET ADAPTOR 3/8" TO 3/4"	1002574



INLET/OUTLET ADAPTOR 1" TO 3/4"	363000
---------------------------------	--------

Description	Part No.
TEE PIECE CONNECTOR ASSEMBLY	1002584



WATER HARDNESS TEST KITS

Recommended to identify the carbonate hardness of the on site water supply. Temporary hardness kit required for combi ovens/beverage machines etc. Total hardness required for glass/dishwashers when using Clean and Clean Extra filters.

Description	Part No.
BRITA TEMPORARY HARDNESS TEST KIT	710800
BRITA TOTAL HARDNESS TEST KIT	536754



3M WATER FILTER

Description	Part No.
3M AP2-C401-SG WATER FILTER	3MAP2-C401SG



INLINE WATER FILTER

For the removal of chlorine, bad tastes, odours and the prevention of scale. Capacity 6000 litres.

Description	Part No.
INLINE WATER FILTER	CTO-S



INSTANTA WATER FILTER CARTRIDGES

Description	Part No.
REPLACEMENT FILTER CARTRIDGE WITH FILTER MONITOR RESET KEY	AQ2
REPLACEMENT FILTER CARTRIDGE WITHOUT FILTER MONITOR RESET KEY	AQ3
WATER FILTER SYSTEM - NO SCALE MONITOR	AQ4
REPLACEMENT CARTRIDGE WITH GREY LABEL	AQ35
REPLACEMENT CARTRIDGE WITH BLUE LABEL	AQ35A



LINCAT WATER FILTER CARTRIDGES

Description	Part No.
REPLACEMENT FILTER CARTRIDGE for Filterflow FX water boilers	FC02
REPLACEMENT FILTER CARTRIDGE for Filterflow water boilers	FC04



EVERPURE REPLACEMENT FILTER CARTRIDGES

Description	Part No.
EVERPURE 4CB5-S FILTER CARTRIDGE	9617-26

Description	Part No.
EVERPURE 4C FILTER CARTRIDGE	9601-00

Description	Part No.
EVERPURE 4H FILTER CARTRIDGE	9611-00

Description	Part No.
EVERPURE ESO 6 FILTER CARTRIDGE	9607-10

Description	Part No.
EVERPURE MH2 FILTER CARTRIDGE	9613-26

Description	Part No.
EVERPURE MC FILTER CARTRIDGE	9612-55

Description	Part No.
EVERPURE QL3B FILTER HEAD	4312-13

Description	Part No.
EVERPURE QL2B FILTER HEAD	4252-16



MANUAL WATER SOFTENER

Stainless steel cylinder with 3/4" water connections. Supplied with resin.



Description	Part No.
DVA MANUAL WATER SOFTENER 8 litres	9V023
DVA MANUAL WATER SOFTENER 12 litres	9V029
DVA MANUAL WATER SOFTENER 16 litres	9V031

Description	Part No.
3/4" TAP FOR WATER SOFTENER	403150

WATER SOFTENER SALT

Salt in granular form is suitable for manual water softeners. Salt in tablet form is recommended for automatic water softeners.



Description	Part No.
GRANULAR SALT 10 kg	GRAN10KG
GRANULAR SALT 25 kg	GRAN25KG
SALT TABLETS 10 kg	TAB10KG
SALT TABLETS 25 kg	TAB25KG

FERNOX DS-3 DESCALER

Powerful acid limescale remover that dissolves up to 50% of its own weight of limescale. Safe to use with metals, PVC, ABS rubber polythene and most plastic pipework. Colour change indicated when exhausted.



Description	Part No.
DS-3 DESCALER 2kg tub	61027

EVERPURE DESCALER

Description	Part No.
EVERPURE DESCALER 50G SACHET	9798-31
EVERPURE DESCALER 200G SACHET	9798-33
EVERPURE DESCALER 1KG TUB	9798-35



100MM HEAVY DUTY CASTOR

- + Stainless steel construction
- + With swivel and brake
- + 128mm overall height
- + 150kg load rating
- + If 4 castors are used safe working load is 450kg overall




Description	Part No.
100mm HEAVY DUTY CASTOR	301009
MOUNTING PLATE	301010


100MM BUDGET CASTOR WITH EXPANDER

- + 100mm diameter grey rubber/nylon wheel
- + Expander for 30mm square tube
- + Effective height 128mm
- + Load capacity 85kg

Description	Part No.
100mm BRAKED CASTOR - WITH EXPANDER	301005




Description	Part No.
100mm UNBRAKED CASTOR - WITH EXPANDER	301006



100MM BUDGET CASTOR WITH MOUNTING PLATE

- + 100mm diameter grey rubber/nylon wheel
- + 76x76mm mounting plate
- + Effective height 132mm
- + Load capacity 85kg

Description	Part No.
100mm BRAKED CASTOR - WITH MOUNTING PLATE	301007

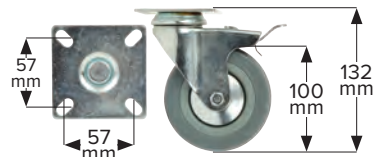


Description	Part No.
100mm UNBRAKED CASTOR - WITH MOUNTING PLATE	301008




125MM BUDGET CASTOR WITH EXPANDER

- + Grey thermoplastic wheel
- + Expander for 30mm square tube
- + Effective height 150mm

Description	Part No.
125mm BRAKED CASTOR - WITH EXPANDER	301001




Description	Part No.
125mm UNBRAKED CASTOR - WITH EXPANDER	301002




100MM CHROME PLATED SWIVEL BOLT CASTOR

- + Chrome plated with non mark TUTPR wheel
- + Effective height 130mm
- + 90kg load rating
- + If 4 castors are used safe working load is 270kg overall

Description	Part No.
100mm BRAKED CASTOR - WITH SWIVEL BOLT	301014




Description	Part No.
100mm UNBRAKED CASTOR - WITH SWIVEL BOLT	301015




100MM CHROME CASTOR WITH MOUNTING PLATE

- + Chrome plated with non mark TUTPR wheel
- + Effective height 130mm
- + 90kg load rating
- + If 4 castors are used safe working load is 270kg overall

Description	Part No.
100mm BRAKED CASTOR - WITH MOUNTING PLATE	301016

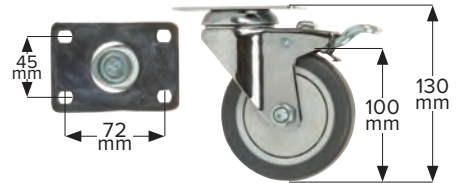


Description	Part No.
100mm UNBRAKED CASTOR - WITH MOUNTING PLATE	301017

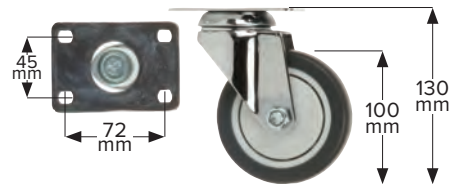


125MM CHROME CASTOR WITH MOUNTING PLATE

- + Chrome plated with black rubber/nylon wheel
- + Effective height 155mm
- + Load capacity 85kg

Description	Part No.
125mm BRAKED CASTOR - WITH MOUNTING PLATE	301003

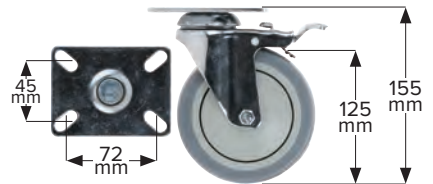

Description	Part No.
125mm UNBRAKED CASTOR - WITH MOUNTING PLATE	301004

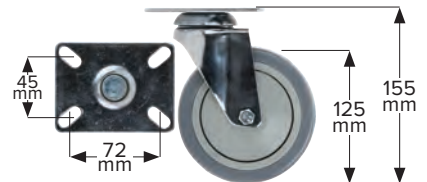

LEG EXPANDERS

Description	Part No.
ROUND EXPANDER FOR 19 - 21.5mm TUBE	302001
ROUND EXPANDER FOR 21.5 - 24mm TUBE	302002
ROUND EXPANDER FOR 24 - 27mm TUBE	302003
ROUND EXPANDER FOR 27 - 30mm TUBE	302004
ROUND EXPANDER FOR 31 - 35mm TUBE	302005



Description	Part No.
SQUARE EXPANDER FOR 21.5 - 24mm SQ LEG	302006
SQUARE EXPANDER FOR 24 - 27mm SQ LEG	302007
SQUARE EXPANDER FOR 27 - 30mm SQ LEG	302008
SQUARE EXPANDER FOR 32 - 35mm SQ LEG	302009
SQUARE EXPANDER FOR 36 - 40mm SQ LEG	302010



ZINC FLANGED FEET

- + To fit 30mm square tube
- + Height - 64-99mm
- + Tube Thickness - 1.2mm or 1.5mm
- + Vertical Load - 1250kg

Description	Part No.
ZINC FLANGED FOOT	553031000
NICKEL PLATED ZINC FLANGED FOOT	553031001



CABINET DOOR ROLLERS & TRACKS

Description	Part No.
ALUMINIUM DOOR TRACK 2000mm long	407572000
ALUMINIUM DOOR TRACK 3000mm long	407573000



Description	Part No.
STRAIGHT REAR DOOR SHEAVE steel roller & ball bearing	417585521



Description	Part No.
OFFSET FRONT DOOR SHEAVE steel roller & ball bearing	417585511



HOTCUPBOARD ROLLERS

Description	Part No.
HOTCUPBOARD ROLLER	0502
AXLE FOR HOTCUPBOARD ROLLER	0503



GUIDE PIN FOR SLIDING DOORS

Description	Part No.
GUIDE PIN	407561096




STAINLESS STEEL GN 1/1 & 2/1 GRIDS

Description	Dimensions	Part No.
STAINLESS STEEL GRID GN 1/1	530x325mm	307201
STAINLESS STEEL GRID GN 2/1	530x650mm	307202



GREY COATED GN 1/1 & 2/1 GRIDS

Description	Dimensions	Part No.
GREY COATED GRID GN 1/1	530x325mm	307211
GREY COATED GRID GN 2/1	530x650mm	307212

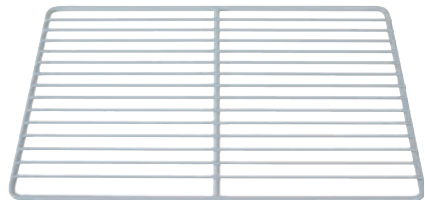

DISHWASHER RACKS

Industry standard size 500x500mm plastic racks.

Description	Part No.	Trade Price
PLATE RACK 500X500X100MM	370001	
CUP/GLASS RACK 500X500X100MM	370002	
CUTLERY RACK 500X500X100MM	370003	
8 COMPARTMENT CUTLERY BASKET 130X210X425MM	370004	
GLASS/CUP RACK 500X500X100MM	370005	
CUTLERY RACK 500X500X100MM	370006	
PEGGED PLATE RACK 500X500X100MM	370007	
TRAY RACK 500X500X100MM	370008	
8 COMPARTMENT CUTLERY BASKET 410X210X130MM	370009	£10.50



TESTO 320B FLUE GAS ANALYSER

The Testo 320B Flue Gas Analyser is ideal for carrying out installation and maintenance work on catering equipment. In conjunction with the supplied flue gas probe, the compact flue gas analyser can be used to measure flue gas, draught, pressure, ambient CO and differential temperature. In the set you also get practical accessories, to make handling easier.



- + Temperature measurement range: -40 to 1200°C
- + Dimensions: 240 x 85 x 65mm
- + Weight: approximately 573 g
- + Power: rechargeable battery 3.7V/2400 mAh, mains 6V/1.2A

Description	Part No.
TESTO 320B FLUE GAS ANALYSER (STANDARD SET) includes Testo 320B Flue Gas Analyser, USB Charger, Flue gas probe 180mm/300mm P-Type D=6mm and case	0563322371
TESTO 320B FLUE GAS ANALYSER (ADVANCED SET WITH PRINTER) includes Testo 320B Flue Gas Analyser, incl. case, USB Charger, Flue Gas probe 180mm/300mm P-Type D=6mm, IRDA printer, Hose connection set, temp set and Spare particle filters.	0563322372

The Testo 320 is the similar to the 320B but has Bluetooth connectivity which allows it to connect to the free Testo Combustion App (Android devices only)

Description	Part No.
TESTO 320 FLUE GAS ANALYSER (STANDARD SET) includes Testo 320 Flue gas analyser with O ₂ & CO sensor and Bluetooth, International mains unit, Basic flue gas probe (180mm, Ø 6mm) and hard carry case	0563322077
TESTO 320 FLUE GAS ANALYSER (ADVANCED SET) includes Testo 320 Flue gas analyser with O ₂ & CO sensor and Bluetooth, International mains unit, Basic flue gas probe (180mm, Ø 6mm), Differential Pressure Set, Differential Temperature Set and hard carry case	0563322078
TESTO 320 FLUE GAS ANALYSER (ADVANCED SET WITH PRINTER) includes Testo 320 Flue gas analyser with O ₂ & CO sensor and Bluetooth, International mains unit, Basic flue gas probe (180mm, Ø 6mm), Differential Pressure Set, Differential Temperature Set, Infrared printer and hard carry case	0563322079



Consumables

Description	Part No.
6 ROLLS OF THERMAL PAPER FOR IR PRINTER	05540568
Description	Part No.
10 SPARE PARTICLE FILTERS	05540040



TESTO 327 FLUE GAS ANALYSER

The Testo 327 Flue Gas Analyser is your introductory instrument to flue gas analysis. It measures combustion efficiency, °C, O₂, CO₂, CO and flue draught. The strong LED background light in the 4 line display guarantees an easy-to-read display even if lighting conditions are unfavourable. The analyser stands out on account of its easy menu navigation and ergonomic housing as well as its durability.

- + Temperature measurement range: -40 to 600°C
- + Dimensions: 216 x 68 x 47mm
- + Weight: approximately 500 g
- + Power: rechargeable battery 3.7V/2400 mAh, mains 6V/1.2A



Description	Part No.
TESTO 327 FLUE GAS ANALYSER (STANDARD SET) Includes Testo 327 Flue Gas Analyser, rechargeable battery and calibration protocol, Flue Gas Probe (180mm x 6mm diameter), Carry case.	0563320370
TESTO 327 FLUE GAS ANALYSER (ADVANCED SET WITH PRINTER) Includes Testo 327 Flue Gas Analyser, rechargeable battery and calibration protocol, Flue Gas Probe (180mm x 6mm diameter), Differential hose kit, Differential temperature kit, testo infrared printer (0554 0547), carry case.	0563320371

TESTO 310 FLUE GAS ANALYSER

The Testo 310 Flue Gas Analyser combines simple functions with a high level of measurement accuracy, and is perfect for all basic measurements on heating systems. Long battery lifetimes of up to 10 hours guarantee high availability. It's easy handling and compact design make the Testo 310 a robust tool for daily work – even when things get rough.

Case includes:

- + Temperature measurement range: 0 to 400°C
- + Battery with mains recharger
- + 180mm probe with cone
- + 5 particle filters
- + Silicone hose for pressure measurement



Description	Part No.
TESTO 310 FLUE GAS SET	05633100
TESTO 310 FLUE GAS SET WITH PRINTER	05633110

TPI 709R FLUE GAS ANALYSER

TPI 709R Flue Gas Combustion Efficiency Analyser is designed to measure CO, O₂, temperature & pressure and calculate CO₂ (in a flue), CO/CO₂ ratio, efficiency and excess air. Using the respective probe, the CO₂ and CO content in the surroundings can also be measured. All the features needed for measuring the performance of gas systems in commercial catering equipment, including COMCAT 5 forced draft burners, to ensure compliance with Gas Safety (Installation and Use) Regulations 1998. Long life O₂ & CO sensors, a 6 year warranty period and fixed price annual servicing mean low cost of ownership over the long term. Water trap and disc filter on the thermocouple gas sampling probe provides complete protection from water ingress into the instrument. In-line pump protection filter stops dust/dirt ingress into the pump, which is the main cause of pump/analyser failure.

Kits available with Optional IR printer, temperature pipe clamps, CPA1 probes and gas leak detector.

- + Temperature measurement range: -40 to 800°C
- + Fuels: natural gas, LPG, light oil, heavy oil
- + OPT 1 (bituminous coal)
- + OPT 2 (anthracite coal)
- + OPT 3 (coke)
- + OPT 4 (butane)
- + OPT 5 (dry wood)
- + OPT 6 (bagasse)
- + Display: backlit LCD
- + Data Storage: 50 sets of readings
- + Time & Date: 24 hour real time clock
- + Dimensions: 200 x 90 x 60mm
- + Weight: approximately 500 g
- + Battery: rechargeable Ni-MH battery 6 hour life
- + Battery Charger: 115 or 230V 50/60Hz



Description	Part No.
TPI 709R COMBUSTION ANALYSER STD KIT includes 709R in a protective rubber boot, soft carry case, rechargeable battery pack & charger, pressure adaptors, ambient air probe, spare particle filter and manual	709RKIT
TPI 709R COMBUSTION ANALYSER STD KIT C/W IR THERMAL PRINTER	709RKIT1

TPI A740 INFRA RED THERMAL PRINTER

Used with selected TPI instruments to print hard paper copies of measurement data. Adjustable contrast (low, norm, high). 18 inch maximum transmitting distance. Operates on 4 AA batteries or optional AC adapter.



Description	Part No.
TPI A740 INFRA RED THERMAL PRINTER	A740
10 THERMAL PAPER ROLLS FOR IR PRINTER	A746

TESTO 315-3 CO/CO₂ AMBIENT AIR MONITOR

Provides parallel and direct CO/CO₂ measurement in ambient air according to EN 50543. It is ideal for measuring air quality around gas heated equipment in a commercial catering premises and ensuring safe working conditions. Includes battery with USB mains charger in a case.



Description	Part No.
TESTO 315-3 AMBIENT CO/CO ₂ AIR MONITOR	3006323153
TESTO 315-3 AIR MONITOR WITH PRINTER	3006323155

TPI 1010A CO/CO₂ AIR QUALITY METER

Measures ambient carbon dioxide (CO₂), carbon monoxide (CO), temperature, relative humidity, dew point, wet bulb. Logs up to 4,000 readings in 1 second to 23 hour 59 minute intervals. Print results via I/R to optional printer (Model A740) or download to a computer using the USB cable.

- + Measures CO₂: 0 to 5000 ppm with audio/visual alarm at selectable level
- + Measures CO: 0 to 500 ppm with accuracy of ± 3 ppm or $\pm 5\%$ of reading
- + Temperature: -20 to +60°C
- + Relative Humidity: 5% to 95% with accuracy of 1°C
- + Dew Point: -44 to 57°C
- + Wet Bulb: -16 to 57°C
- + Dimensions: 230 x 90 x 40mm
- + Power: 3 batteries type AA typical life of 40h without backlight



Description	Part No.
TPI 1010A CO/CO ₂ AIR QUALITY METER	1010A

TPI 770 AMBIENT CO MONITOR

Measures ambient carbon monoxide (CO) level with visual and audible alarm to indicate user set value for unsafe levels. The audible alarm can be switched on and off as required. Displays the max CO reading and elapsed time since power on. Meets the requirements of BS 7967, is RoHS compliant and is UL listed.

- + Measures CO: 0 to 999 ppm with accuracy of ± 3 ppm or $\pm 5\%$ of reading
- + Resolution: -1 ppm
- + Dimensions: 385 x 152 x 70mm

Description	Part No.
CARBON MONOXIDE MONITOR	770



MASTERCool INFRARED THERMOMETERS

52224-A INFRARED THERMOMETER WITH LASER



52224-D INFRARED THERMOMETER WITH MULTI LASER



52225-A DUAL TEMP PLUS INFRARED THERMOMETER



52225-B INFRARED THERMOMETER WITH DUAL LASER



Part No	52224-A	52224-D	52225-A	52225-B
Non-Contact Temperature Range	-50 to 500°C	-60 to 760°C	-60 to 760°C	-60 to 1000°C
Thermocouple Temperature Range			-64 to 1400°C	-64 to 1400°C
Field of View	12:01	12:01	30:01:00	30:01:00
Display Illumination	Backlit LCD Display	Backlit LCD Display	Backlit LCD Display	Backlit LCD Display
IR Target Indicator	Single Laser Spot	Eight Laser Spot	Single Laser Spot	Dual Laser Spot
Emissivity	0.95	Adjustable 0.10 to 1.0	Adjustable 0.10 to 1.0	0.95
Resolution	0.5°C	0.1°C	0.1°C	0.1°C
Modes		E, MIN, MAX, DIFF, AVG	MIN, MAX, DIFF, AVG	MIN, MAX, DIFF, AVG
Accuracy	±2°C or ±2% of reading	±2% of reading or 2°C	±2% of reading	±2% of reading
Response Time	0.5 seconds	1 second	1 second	1 second
Auto Power Off	15 seconds	15 seconds	15 seconds	15 seconds
Battery Life	14 hours approx	14 hours approx	14 hours approx	14 hours approx
Included Accessories	instruction manual moulded carrying case 2 AAA batteries	instruction manual moulded carrying case 2 AAA batteries"	instruction manual moulded carrying case 2 AAA batteries 1m thermocouple probe	instruction manual moulded carrying case 2 AAA batteries
Optional Probes			3m wire/penetration surface/air probes	1 & 3m wire/penetration surface/air probes
Dimensions	200 x 100 x 50mm	200 x 113 x 62mm	280 x 135 x 75mm	280 x 135 x 75mm
Weight	1049g	1060g	1200g (without batteries)	1200g (without batteries)

MASTERCool HANDHELD WATERPROOF DIGITAL THERMOMETER

- + Measuring Range: -58 to 572°F / -50 to 300°C
- + Maximum/Minimum temperature memory
- + Data hold function
- + High/Low temperature alarm setting
- + Key tone for operation confirmation
- + Stainless steel probe
- + Foldaway stand



Description	Part No.
MASTERCool HANDHELD WATERPROOF DIGITAL THERMOMETER	52229

ETI MINI RAYTEMP INFRARED THERMOMETER

Compact, lightweight and low cost infrared thermometer. Simply aim and pull the trigger to display the temperature of the item being measured. Suitable for a wide range of food and industrial applications where contact with the item to be measured is an issue.

- + Temperature range: -50 to 330°C with a 0.1°C resolution
- + Accuracy: $\pm 2^{\circ}\text{C}$ over the range of 0 to 330°C, $\pm 4^{\circ}\text{C}$ from -50 to 0°C
- + Easy to read LCD display with low battery, and backlight indication
- + Auto power off facility that turns the instrument off after 10 seconds to preserve battery life
- + Laser assisted alignment to assist in pin-pointing the area of measurement
- + 12:1 optic ratio (target distance/diameter ratio) and a fixed emissivity of 0.95



Description	Part No.
MULTI FUNCTION THERMOMETER	814-080

ETI MULTI FUNCTION THERMOMETER

Compact digital multi-function thermometer with an easy to read LCD that displays both temperature & the alarm set temperatures.

- + Temperature range: -49.9 to +199.9°C with a 0.1°C resolution
- + Accuracy: $+1^{\circ}\text{C}$ (-20 to +150°C)
- + Display hold facility and max/min memory function
- + Adjustable audible high/low temperature alarm
- + Supplied with stainless steel probe $\varnothing 3.3 \times 125\text{mm}$ with a 1m PVC lead



Description	Part No.
MULTI FUNCTION THERMOMETER	810-961

ETI ECOTEMP MAX /MIN THERMOMETER

Features a large, easy to read, LCD display with display hold and max/min memory functions. Both open circuit and low battery indication are displayed, when applicable.

- + Temperature range: -49.9 to 199.9°C with a 0.1°C/°F resolution
- + Accuracy: ±1°C (-49.9 to 149.9°C)
- + Display: custom 22mm LCD
- + Dimensions: 20 x 58 x 165mm
- + Supplied with stainless steel probe ø3.3 x 125mm with a 700mm silicone lead



Description	Part No.
ECOTEMP MAX/MIN THERMOMETER	810-950

DISHTEMP DISHWASHER THERMOMETER

The DishTemp® dishwasher thermometer simulates a plate as it's cleaned and sanitised in a commercial dishwasher, accurately recording the maximum surface temperature at the touch of a single button. Eliminates the need for costly and inaccurate test strips and stem thermometers that don't stay in place and don't record temperature at the plate surface. Supplied complete with a traceable certificate of calibration, calibrated at one point only 71°C.

- + Uses 3 volt CR2032 lithium coin cell with 5000 hour battery life
- + Dimensions: 14 x Ø127mm
- + Range: 0 to 90°C ±0.5°C accuracy
- + IP66 rated



Description	Part No.
DISHTEMP DISHWASHER THERMOMETER	810-280

ETI PENETRATION TEMPERATURE PROBE

Stainless steel hand held penetration probe Ø3.3 x 130mm with 1000mm straight lead and type K miniature plug connector. Suitable for measuring temperature in a wide variety of applications including meat, liquids and semi-solids.

- + Temperature range: -60 to 250°C
- + Dimensions: Ø3.3 x 130mm x 1000mm lead



Description	Part No.
STAINLESS STEEL PENETRATION PROBE TYPE K	123-160

ETI FIBREGLASS OVEN TEMPERATURE PROBE

This fibreglass exposed junction wire probe is ideal for measuring the air temperature of ovens, hot cupboards and similar appliances.

- + Temperature range: -60 to 350°C
- + Response time less than 0.5 seconds
- + Dimensions: Ø1.5 x 1000mm long fitted with type K miniature plug



Description	Part No.
FIBREGLASS WIRE OVEN PROBE TYPE K	133-382

TESTO 760 DIGITAL MULTIMETER

The Testo 760 digital multimeter family includes three models suitable for all important electrical measuring tasks. Function keys replace the traditional dial on all three instruments, which means easier operation and greater reliability. Measurement parameters are detected automatically via the assignment of the measuring sockets and also shown by the illumination of the appropriate function keys.



Description	Part No.
TESTO 760-1 MULTIMETER	05907601
TESTO 760-2 TRMS MULTIMETER	05907602
TESTO 760-3 TRMS MULTIMETER	05907603

TESTO 770 CLAMP METER

The Testo 770 clamp meter features automatic measurement parameter detection which ensures fast and reliable work. In the current and voltage area, all three versions of the clamp meter detect direct and alternating current and automatically select other parameters such as resistance, diode, capacitance, and continuity where applicable.



Description	Part No.
TESTO 770-1 CABLE-GRAB CLAMP METER	05907701
TESTO 770-2 CABLE-GRAB CLAMP METER	05907702
TESTO 770-3 CABLE-GRAB CLAMP METER	05907703

TESTO 750 VOLTAGE TESTER

The Testo 750 Voltage Tester have an all-round LED display. This means the display can be seen from all angles and guarantees an ideal voltage indication.



Description	Part No.
TESTO 750-1 VOLTAGE TESTER	05907501
TESTO 750-2 VOLTAGE TESTER	05907502
TESTO 750-3 VOLTAGE TESTER	05907503

TESTO 755 CURRENT & VOLTAGE TESTER

The Testo 755 Current & Voltage Testers automatically select the correct setting for the application, minimising dangers associated with using the incorrect settings. Both versions have all the important functions for determining voltage / de-energisation, for measuring current and resistance, as well as for continuity tests.



Description	Part No.
TESTO 755-1 CURRENT-VOLTAGE TESTER	05907551
TESTO 755-2 CURRENT-VOLTAGE TESTER	05907552

TESTO 745 NON-CONTACT VOLTAGE TESTER

The Testo 745 Non-Contact Voltage Tester has a voltage range of up to 1,000 V AC. It is ideal for fast initial checking of any suspected fault sources. The Voltage Tester will flash red and makes a corresponding warning sound if an alternating current is present. It also has a filter for high-frequency interference signals therefore increasing its reliability. IP67 rated.



Description	Part No.
TESTO 745 NON-CONTACT VOLTAGE TESTER	05907450

TPI 133 DIGITAL MULTIMETER

A hand-held autoranging DMM that features extra large numerals on the LCD and data hold for all functions and ranges. The large LCD makes it easy to read at all angles and the majority of lighting levels. Rubber Boot for added protection if the instrument is dropped.

- + 0.5% DCV basic accuracy
- + 0 to 750 ACV with maximum resolution of 1mV
- + 0 to 1,000 DCV; with maximum resolution of 0.1mV
- + 0 to 20MΩ with maximum resolution of 0.1Ω
- + 0 to 10 amps AC/DC with resolution of 0.1uA
- + AT II – 1000V, CAT III – 600V, cULus 61010-1
- + Meets CE and IEC 1010 requirements



Description	Part No.
TPI 133 DIGITAL MULTIMETER (Includes rubber boot, test lead set, 2A fuse, 10A fuse and 9V battery)	133

TPI 265 DIGITAL CLAMP METER

A hand-held, autoranging clamp-on DMM. Ideal for cramped work areas and crowded electrical panels with its slim jaw and body. Extra large numerals, capacitance, frequency and data hold are just a few of the features.

- + Capacitance up to 4,000 micro-farads
- + Up to 400 AC amps with 0.01 resolution
- + Diode, resistance and audible continuity
- + Test start and run capacitors
- + Measure heat anticipator current
- + Determine thermocouple voltage
- + Test line and control voltages
- + Measure heating element resistance
- + Measure and adjust variable frequency drives
- + CAT III 600V rated; cULus 61010



Description	Part No.
TPI 265 DIGITAL CLAMP METER Includes carrying pouch, test lead set, battery	265

TPI 50 NON CONTACT VOLTAGE DETECTOR

Tip glows red when voltage is detected and a buzzer is activated. Non-contact AC voltage detection from 50 to 1000V.

Description	Part No.
TPI 50 NON-CONTACT VOLTAGE DETECTOR	50



DRAPER MULTIMETER

Measures AC/DC voltage, DC current and resistance. 16 position rotary function and range selector. Supplied with test probes and rubber bump cover and 12V battery.

- + DC Voltage: 200mV, 2000mV, 20V, 200V, 500V (acc: $\pm 0.5\%$)
- + AC Voltage: 200V, 500V, (acc: $\pm 2\%$)
- + DC Current: 2000 μ A, 20mA, 200mA (acc: $\pm 2\%$)
- + Resistance: 200 Ω , 2000 Ω , 20k Ω , 200k Ω , 2000k Ω (acc: $\pm 1.5\%$)



Description	Part No.
16 FUNCTION DIGITAL MULTIMETER	52320

FINE WIRE TYPE K THERMOCOUPLE

1m length of class I thermocouple wire terminating in a moulded miniature thermocouple plug.



Description	Part No.
FINE WIRE TYPE K THERMOCOUPLE	704001

SAFE ISOLATION & PHASE FINDER KIT

Kit comprises of:
VIP100 Two Pole Tester

- + Simple two voltage indication 230V and 400V AC/DC
- + Compact design encourages safe site use

SP200 Proving Unit

- + Test two pole volt testers including multimeters and test lamps
- + Step voltage LED's indicate voltage being generated 50-100-230-400-690V



Description	Part No.
SAFE ISOLATION & PHASE FINDER KIT	702040

SAFE ISOLATION & LOCK OFF KIT

Universal lock off kit that is compatible with most circuit breakers.



Description	Part No.
SAFE ISOLATION & LOCK OFF KIT	702041

MARTINDALE VOLTAGE INDICATOR, PROVING DEVICE & LOCK OUT KIT

The complete solution for safe isolation, the Martindale VIPDLOK138 Lock Out Kit contains the VI13800 voltage indicator, PD440 proving device, along with a complete lock out kit, supplied in soft carry cases. The kit simplifies compliance with Health & Safety recommendations for safe working practices when maintaining or installing electrical plant and equipment.



Description	Part No.
MARTINDALE VIPDLOK138 VOLTAGE INDICATOR, PROVING DEVICE & LOCK OUT KIT	VIPDLOK138

MARTINDALE VOLTAGE INDICATOR & PROVING DEVICE KIT

The Martindale VIPD138 kit includes the VI13800 voltage indicator and matching PD440 proving unit. Kits are supplied in the TC69 combination carry cases to ensure that proving devices are always at hand and provide the simplest solution for implementing safe isolation practices on-site in accordance with the Electricity at Work Regulations. For convenience and to save time, the proving unit can be used without having to remove it from the case.



Description	Part No.
MARTINDALE VIPD138 VOLTAGE INDICATOR VI13800 & PD440 PROVING DEVICE KIT	VIPD138

MARTINDALE VOLTAGE INDICATOR

The VI13800 is an essential tool for proving electrical circuits are dead before carrying out maintenance and installation work in accordance with safe isolation procedures. The VI13800 ensures safety through simplicity, with no ranges, switches or batteries, reducing the risk of an incorrect reading.

The VI13800 provides instant visual AC and DC voltage indication in four stages from 50V to 400V. The bright long life LED indicators give clear and immediate display of the voltage level range. It has retractable probes, heavy duty finger guards and a two layer double insulated cable with a white inner core to give clear indication of damage that might compromise the user's safety.



Description	Part No.
MARTINDALE VI13800 VOLTAGE INDICATOR	VI13800

MARTINDALE 440V AC PROVING UNIT

The Martindale PD440 is a 440V AC proving device, designed to enable voltage indicators to be fully checked, in compliance with Health & Safety recommendations. Using a voltage indicator without first proving it is working correctly could prove fatal.

The PD440 is compatible with the new Martindale VI13800 & the Martindale VI13700.



Description	Part No.
MARTINDALE PD440 440V AC PROVING UNIT	PD440

MARTINDALE PC105 3 PHASE INDUSTRIAL SOCKET TESTERS

The Martindale PC105 is a 3-phase socket tester for checking supply faults and incorrect wiring of CEE 5 pin socket outlets. It is available in a 16A, 32A and 63A models. It will check for phase presence, phase sequence, PE presence and also checks for neutral presence.



Description	Part No.
MARTINDALE PC105 3 PHASE INDUSTRIAL SOCKET TESTER 16A	PC105/16
MARTINDALE PC105 3 PHASE INDUSTRIAL SOCKET TESTER 32A	PC105/32
MARTINDALE PC105 3 PHASE INDUSTRIAL SOCKET TESTER 63A	PC105/63

MARTINDALE INDUSTRIAL PLUG LOCKOUT


Completely encloses plugs to prevent accidental reconnection. Once the plug is inserted, the lock out device should be locked with a secure padlock and completed with a warning tag. Suitable for use with most plugs up to and including 32A. Inner dimensions – 80mm diameter and 150mm length.



Description	Part No.
MARTINDALE PL8 INDUSTRIAL PLUG LOCKOUT	PL8

MARTINDALE APPLIANCE LOCK OUT

The PL13 is a universal lock out device for UK BS1363 13A mains plugs. Simple and compact, the PL13 prevents appliances and electrical equipment from being plugged in during maintenance and can be used to restrict the use of hazardous or faulty equipment.



Description	Part No.
MARTINDALE PL13 APPLIANCE LOCK OUT	PL13

MARTINDALE RED SAFETY PADLOCK

38mm safety padlock supplied with one key.



Description	Part No.
MARTINDALE RED SAFETY PADLOCK 38MM	PAD10R

MARTINDALE COMPREHENSIVE LOCK OUT KIT

Electrical safety is paramount when performing 17th Edition and Part P installation testing. Every year people suffer electric shock and burn injuries, some of which are fatal. Implementing the correct safe isolation procedures will ensure the safety of the electrician and avoid these accidents.

The Martindale universal lock out kit is compatible with most circuit breakers. It is supplied with a padlock that has its own unique key, and a safety hasp that enables multiple users to lock off with space for up to 6 padlocks.

The full 16 piece kit includes:

- + 1 x Padlock with unique key
- + 1 x Steel safety hasp, with space for up to 6 padlocks
- + 1 x Green mini MCB lock
- + 1 x Yellow mini MCB lock
- + 1 x Blue medium MCB lock
- + 1 x Large red MCB lock
- + 1 x Small red MCB lock
- + 1 x Red fuse lockout breaker
- + 1 x Yellow fuse lockout breaker
- + 5 x Danger tags which can be overwritten
- + 1 x Black marker for writing on Danger tags
- + 1 x TC55 soft carry case



Description	Part No.
MARTINDALE LOKKIT1 COMPREHENSIVE LOCK OUT KIT	LOKKIT1

MARTINDALE TEK 500 MICROWAVE DETECTOR

Easy to use, low cost detector for microwave ovens. Tests to BS 5175 and complies with NRPB-GS11 on permitted exposure levels. Indicates leakage levels using bright LEDs in a traffic light system. Includes a beaker and digital thermometer for testing that the microwave is heating correctly. Also includes carrying case, instruction manual and 9V battery.



Description	Part No.
TEK 500 MICROWAVE DETECTOR	TEK500

CLEAR LENS ELECTRICAL SAFETY SPECS

Provides low energy impact protection at extreme temperatures and UV protection against electrical arc discharges caused by a short circuit. Ultra light nylon frame with length adjustment the temples and front angle adjustment for low friction, lined with soft foam for user comfort and increased adherence. One-piece, scratch resistant, anti-mist clear polycarbonate lens. As well as the arms having hang cord attachment points, a black universal hang cord is included with the goggles. Resistant to liquids (drops and splashes) and gross particles (dust particles >5 microns).



Description	Part No.
CLEAR LENS ELECTRICAL SAFETY SPECS	705001

BM POLYCO ELECTRICAL SAFETY LATEX GLOVES

Insulated latex electrical safety gloves designed to protect the wearer from electrical currents up to 1000Vac. The Class 0 rated gloves are 36cm long to provide protection to the wearer's lower arms. Certified to EN60903.



Description	Part No.
BM POLYCO ELECTRICAL SAFETY LATEX GLOVES SMALL	705010
BM POLYCO ELECTRICAL SAFETY LATEX GLOVES MEDIUM	705011
BM POLYCO ELECTRICAL SAFETY LATEX GLOVES LARGE	705012

OXY TURBOSET 110 WELDING/BRAZING KIT

Small lightweight system in a compact metal carrier complete with disposable gas cylinders.

Kit includes:

- + 1 x Oxygen Cylinder
- + 1 x Mapp Gas Cylinder
- + Flint Lighter
- + Protective Goggles
- + Star with 4 Nozzles
- + Multipurpose Spanner
- + Filler Metal and Flux



Description	Part No.
OXY TURBOSET 110 WELDING KIT	OXY-131090.02M

NSR S3 SERIES BRAZING TORCH

For soldering and brazing copper, brass and steel using propane or MAPP gas cylinder. Quick, self lighting, with variable flame control and brass tip that swivels 360 degrees. Four way control lock.



Description	Part No.
S3 SERIES BRAZING TORCH	030

SKI TYPE BRAZING/WELDING GOGGLES

One piece goggle with soft moulded body and spatter resistant acetate lens. Wide vision and shade 5 lens. Meets requirements of EN166 and EN169.



Description	Part No.
SKI TYPE BRAZING/WELDING GOGGLES	P3310

FLIP-UP BRAZING/WELDING GOGGLES

One piece goggle with soft moulded body and flip lens design. Indirect vent PVC housing. Rectangular 108 x 50mm flip up screen. Clear and shade 5 lens. Meets requirements of EN166, EN169 and EN175.



Description	Part No.
FLIP-UP BRAZING/WELDING GOGGLES	P3390

REPLACEMENT GAS CYLINDERS

MAPP Gas and Oxygen cylinders suitable for the Oxy Turboset system and similar gas brazing torches.



Description	Part No.
MAPP-PLUS GAS CYLINDER 453G	902014
OXY TURBO OXYGEN CYLINDER	OXY-480300

LEAD FREE PLUMBING SOLDER

Description	Part No.
LEAD FREE PLUMBING SOLDER	6887



CURA HEAT ACTIVATED FLUX

For capillary joints in copper, brass and mild steel pipework. Conforms to BS6920 and WRAS approved for hot and cold water. Suitable for gas pipework and lead/lead free solders.



Description	Part No.
CURA HEAT ACTIVATED FLUX	19260

STEEL WIRE WOOL

Medium Grade.

Description	Part No.
STEEL WIRE WOOL MEDIUM 450G	7445

Description	Part No.
STEEL WIRE WOOL PACK OF 3 PADS (fine, medium and coarse)	18498



3 PIECE WIRE/NYLON BRUSH SET

Set of three 230mm long brushes with bristles of brass, nylon and stainless steel.



Description	Part No.
WIRE/NYLON BRUSH SET	26928

HOSE CLAMPS

Description	Part No.
HOSE CLAMP 10-16MM	409081
HOSE CLAMP 15-25MM	409082
HOSE CLAMP 25-40MM	409083
HOSE CLAMP 32-50MM	409084
HOSE CLAMP 60-80MM	409085



O-RING SETS

Each pack contains an assortment of sizes.

Description	Sizes	Part No.
425 PIECE O-RING SET	9.5x1.9 up to 27x3.6	322090
880 PIECE O-RING SET	8.7x1.9 up to 30.2x3.6	322091



DRAPER SELF TAPPING SCREW SET

305 self tapping screw assortment in a plastic cantilever storage container. Contains assortment of popular sizes in a plated finish to resist corrosion.

Description	Part No.
305 PIECE SELF TAPPING SCREW SET	61275



DRAPER PAN HEAD SCREW & NUT SET

366 pan head screw and nut assortment in a plastic cantilever storage container. 186 (approximately) pan head screw sizes M3x10 to M6x25, 180 (approximately) hexagon nuts sizes M3, M4, M5 and M6.

Description	Part No.
366 PIECE PAN HEAD SCREW & NUT SET	61272



DRAPER HAND RIVETER KIT

Hand Riveter Kit for aluminium rivets. Cast aluminium body and carbon steel moving handle with moulded grips. With four interchangeable nozzles for 2.4, 3.2, 4.0 and 4.8mm rivets. Supplied with approximately 100 rivets.

Description	Part No.
HAND RIVETER KIT	27843



RIVET PACKS

Aluminium rivets with steel mandrel. 50 rivets per card.

Description	Part No.
2.4x7mm RIVETS - 50 PER CARD	13554
3.2x10.8mm RIVETS - 50 PER CARD	13555
4x5.6mm RIVETS - 50 PER CARD	13556
4.8x5.8mm RIVETS - 50 PER CARD	13557



DRAPER COMPARTMENT ORGANISERS

Plastic organisers with adjustable lift out compartments. Case incorporates carrying handle, 'snap fit' closures and a clear plastic lid.

Description	Part No.
15 COMPARTMENT ORGANISER	25922
22 COMPARTMENT ORGANISER	25924



RATIONAL HYDRAULIC PULLER KIT

Description	Part No.
HYDRAULIC FAN WHEEL PULLER KIT	W33205



HYDRAULIC PULLER KIT

For removing fan wheels, bearings, gears, sprockets and bushes. 10 ton capacity hydraulic ram with tommy bar. Comes in metal storage case.

Set contains:

- + 1x hydraulic ram
- + 1x separator
- + 2x 200mm main rods
- + 2x 230mm extension rods
- + 1x beam
- + 1x ram nut



Description	Part No.
HYDRAULIC BEARING SEPARATOR SET 75-105MM	KEN5034720K

FAST FIT MICRO PULLER

Ideal for removing small bearings. The legs and beams are manufactured from high quality steel and heated treated for extra strength. Self-centring force screw with 'T' bar and 13 hex drive

- + Puller Spread Min-Max: 19-45mm
- + Puller Reach: 73mm




Description	Part No.
FAST FIT MICRO PULLER	702078

6 PIECE GAS JET REAMER SET

6 piece jet reamer set with diameter range of 0.6-0.8-1-1.3-1.6-2mm.

Description	Part No.
6 PIECE GAS JET REAMER SET 0.6-2mm	703081



12 PIECE GAS JET REAMER SET

12 piece jet reamer set with diameter range of 0.6 to 1.9mm.

Description	Part No.
12 PIECE GAS JET REAMER SET 0.6-1.9mm	703082



U TUBE MANOMETERS

Resilient plastic gauges with high impact PVC case and cover, which slots into the base to form a stand. Fitted with a rubber sucker as an alternative support. Plastic U tube with choice of flexible or rigid perspex with graduations in mb and inches. Supplied with a short length of rubber hose. Dimensions: 395 x 37 x 25mm (30mb) 595 x 37 x 25mm (45mb).

Description	Part No.
30mb MANOMETER FLEXIBLE U TUBE	702020
30mb MANOMETER HARD PERSPEX U TUBE	702021
45mb MANOMETER HARD PERSPEX U TUBE	702022
RED RUBBER HOSE 6mm id x 2000mm long	702023



COBALT DRILL BIT SET

19 piece cobalt drill bit set suitable for use on alloy steel, hardened steel, stainless steel, cast iron and titanium. Sizes 1 to 10mm in 0.5mm increments.

Description	Part No.
19 PIECE SET OF COBALT DRILL BITS 1 TO 10MM	216-678



DRAPER METRIC HSS COBALT DRILL BITS

Metric sized, high speed steel drill bits with 5% cobalt. The cobalt prevents wear and makes the bit ideal for drilling hard materials such as stainless steel. Drill bits in sizes 1,1.5 and 7 to 13mm also available.

Description	Part No.
2.0MM COBALT TWIST DRILL	39091
2.5MM COBALT TWIST DRILL	39092
3.0MM COBALT TWIST DRILL	39093
3.2MM COBALT TWIST DRILL	39098
3.5MM COBALT TWIST DRILL	39116
4.0MM COBALT TWIST DRILL	39133
4.5MM COBALT TWIST DRILL	39154
5.0MM COBALT TWIST DRILL	39222
5.5MM COBALT TWIST DRILL	39227
6.0MM COBALT TWIST DRILL	39229
6.5MM COBALT TWIST DRILL	39230



DRAPER HSS TWIST DRILLS

Expert Quality, high speed straight shank twist drills to DIN 338 and ISO 235/1.

Description	Part No.
2mm HSS TWIST DRILL ea	38609
2.5mm HSS TWIST DRILL ea	38610
3mm HSS TWIST DRILL ea	38611
3.5mm HSS TWIST DRILL ea	38615
4mm HSS TWIST DRILL ea	38616
5mm HSS TWIST DRILL ea	38621
6mm HSS TWIST DRILL ea	38623



DRAPER STEPPED DRILL BIT SD4-20MM

Drills in 2mm steps from 4mm to 20mm in steel, brass, copper, aluminium, wood and plastics.

Description	Part No.
STEP DRILL BIT 4-20MM	53866



NSR COMPACT & HEAVY DUTY PIPE CUTTERS

Description	Tube Sizes	Part No.
COMPACT PIPE CUTTER	1/8" to 5/8" OD	CT-127
HEAVY DUTY PIPE CUTTER	1/8" to 1-1/8" OD	CT-274



DRAPER VDE 10 PIECE INTERCHANGEABLE SCREWDRIVER SET

Contents:

- + 4 plain slot sizes: 3.0 x 100, 4.0 x 100, 5.5 x 100 and 6.5 x 100mm
- + 2 cross slot sizes: No.1 and 2
- + 2 PZ TYPE: No1 and 2
- + Fully insulated high torque screwdriver handle
- + Fully insulated precision screwdriver handle



Description	Part No.
DRAPER VDE 10 PIECE INTERCHANGEABLE SCREWDRIVER SET	05721

DRAPER EXPERT VDE SCREWDRIVER SET

For working on live circuits of 1kV AC and 1.5kV DC, tested to 10kV. Chemically blacked Chrome Vanadium steel blades with fully insulated soft grip handle with deep set blade sheath for safety. 2 plain slot size: 2.5 x 75 and 5.5 x 125mm and 2 PZ No.1 and No.2 compatible with *Pozidriv®/Supadriv®.



Description	Part No.
VDE APPROVED 4 PIECE SCREWDRIVER SET	69233
VDE APPROVED 11 PIECE SCREWDRIVER SET	69234

DRAPER VDE HAND TOOLS

Expert Quality, special steel hardened and tempered with cutting edges separately induction hardened. Ergonomic handle provides improved performance while each plier is individually tested to 10,000V for safe 1000Vac or 1500Vdc live line working.

Description	Part No.
VDE COMBINATION PLIERS 160MM	69170
VDE COMBINATION PLIERS 180MM	69171
VDE COMBINATION PLIERS 200MM	69172



Description	Part No.
VDE LONG NOSE PLIERS 160MM	69174
VDE LONG NOSE PLIERS 200MM	69176



Description	Part No.
VDE DIAGONAL SIDE CUTTERS 180MM	69180
VDE DIAGONAL SIDE CUTTERS 200MM	69181



Description	Part No.
VDE WIRE STRIPPERS 160MM	50256



Description	Part No.
VDE WATERPUMP PLIERS 250MM	50293



DRAPER 7 PIECE REVERSIBLE RATCHETING SPANNER SET

Convenient to use reversible ratcheting spanners, is especially suited for use in confined spaces as only 5° movement is required. Manufactured from chrome vanadium steel with 15° offset head.

+ Sizes - 8, 10, 12, 13, 14, 17 and 19mm



Description	Part No.
DRAPER 7 PIECE REVERSIBLE RATCHETING SPANNER SET	51179

DRAPER SOFT GRIP ADJUSTABLE WRENCHES

Expert Quality, crescent-type wrenches manufactured from chrome vanadium steel hardened and tempered with a black oxide finish. Fitted with soft grip handles for comfort and with metric scale on the fixed jaw.



Description	Length	Capacity	Part No.
SOFT GRIP ADJUSTABLE WRENCHES	150mm	19mm	24893
SOFT GRIP ADJUSTABLE WRENCHES	200mm	24mm	24894
SOFT GRIP ADJUSTABLE WRENCHES	250mm	30mm	24896
SOFT GRIP ADJUSTABLE WRENCHES	300mm	38mm	24897

DRAPER ADJUSTABLE WRENCHES

Expert Quality, crescent-type wrenches manufactured from chrome vanadium steel hardened and tempered with black phosphate finish, polished profile and jaws. Jaws offset at 22°. The 150, 200, 250 and 300mm sizes have a graduated scale on the fixed jaws. Suitable for use in areas where chemicals and chrome plate can give off poisonous fumes.



Description	Length	Capacity	Part No.
ADJUSTABLE WRENCHES	150mm	24mm	52679
ADJUSTABLE WRENCHES	200mm	29mm	52680
ADJUSTABLE WRENCHES	250mm	33mm	52681
ADJUSTABLE WRENCHES	300mm	38mm	52682
ADJUSTABLE WRENCHES	375mm	45mm	52683
ADJUSTABLE WRENCHES	450mm	57mm	52684

DRAPER HEAVY DUTY WATERPUMP PLIERS

Expert Quality, chrome vanadium steel hardened and tempered with chemically blacked finish, featuring multi position adjustments and 'no-nip' PVC dipped handles, which prevent the handles from locking together at their largest capacity and nipping the users hands.



Description	Part No.
EXPERT 250MM HEAVY DUTY WATERPUMP PLIERS	84445

DRAPER CIRCLIP PLIERS SET 5PC

Combination circlip pliers set for inside or outside circlips.
Contents:

- + Two straight heads
- + One 90° head
- + One 45° head
- + Pair of handles




Description	Part No.
CIRCLIP PLIER SET 5PC	19735

DRAPER CIRCLIP PLIERS

Industrial quality, chrome nickel steel hardened and tempered with a polished finish, chemically blacked tips and special non slip cushion-grip handles.

Description	Part No.
180MM STRAIGHT TIP EXTERNAL CIRCLIP PLIERS	38997
180MM STRAIGHT TIP INTERNAL CIRCLIP PLIERS	38995
170MM 90° DEGREE TIP EXTERNAL CIRCLIP PLIERS	38998
170MM 90° TIP INTERNAL CIRCLIP PLIERS	38996



DRAPER ALLEN KEY SETS

Manufactured from chrome vanadium steel that's hardened and tempered.
Held in plastic storage holder.

Description	Sizes	Part No.
ALLEN KEYS - METRIC - SET	2.0, 2.5, 3.0, 4.0, 5.0, 5.5, 6.0, 7.0, 8.0 & 10.0mm	33687
ALLEN KEYS - IMPERIAL - SET	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 7/32, 1/4, 5/16 & 3/8"	33688
EXTRA LONG METRIC HEXAGON & BALL END HEXAGON KEY SET (10 PIECE)	2.0, 2.5, 3.0, 4.0, 5.0, 5.5, 6.0, 7.0, 8.0 & 10.0mm	33719



DRAPER TX-STAR® KEY SET

Manufactured from S2 steel hardened and tempered with shot blast finish. Draper TX-STAR® products are compatible with 'Torx fixing systems.



Description	Sizes	Part No.
EXTRA LONG DRAPER TX-STAR® KEY SET (9 PIECE)	T10, T15, T20, T25, T27, T30, T40, T45 & T50	33748

DRAPER SOCKET SETS

Expert Quality, six point sockets made from chrome vanadium steel that's hardened, tempered and micro satin finish for added corrosion protection. Supplied with a 72 tooth reversible soft grip ratchet and accessories. In 33687 each socket has a knurled ring for extra grip.



Description	Contents	Part No.
1/4" SQ. DR. METRIC SOCKET SET IN METAL CASE (26 PIECE)	13 sockets size: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm 7 deep sockets size: 5, 6, 7, 8, 10, 11, 13mm 72 tooth reversible ratchet with soft grip handle and quick release button 2 wobble extension bars size: 50 and 100mm sliding 'T' bar universal joint spinner handle	16468
1/4" SQ. DR. METRIC SOCKET SET IN PLASTIC CASE (20 PIECE)	13 sockets size: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm 72 tooth reversible ratchet with soft grip handle and quick release button 3 wobble extension bars sizes: 50, 75 and 150mm sliding 'T' bar universal joint flexible handle	16442

DRAPER AUTOMATIC RETRACTABLE KNIFE


Retractable pattern complete with a two notch blade which retracts automatically when released. Diecast zinc alloy with enamelled finish.



Description	Part No.
AUTOMATIC RETRACTABLE TRIMMING KNIFE	66274

DRAPER INSPECTION MIRRORS

Fully flexible shaft and fixed head with mirror 55mm diameter to give good visibility in concealed areas. Plated finish with plastic grip.

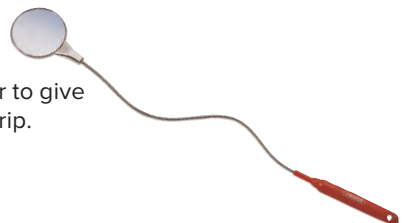

Description	Part No.
FLEXIBLE SHAFT INSPECTION MIRROR	11954

DRAPER TECHNICIANS LAPTOP & TOOL BAG

Manufactured from water repellent polyester with adjustable carrying handle and detachable shoulder strap. Multiple internal and external pockets for storing tools, equipment and computers etc.



Description	Part No.
DRAPER TECHNICIANS LAPTOP & TOOL BAG	89209

KLEIN TOOLS TRADESMAN PRO™ BACKPACK

- + 39 pockets for tons of tool storage
- + Hard, moulded front pocket protects safety glasses
- + Front zip-up pocket for small parts and tools.
- + Taller bag and interior pockets allow storage of long screwdrivers.
- + Fully moulded bottom for protection from the elements.
- + Orange interior for easy tool visibility
- + 1680d ballistic weave for durability
- + Shoulder straps with extra padding and handles for easy carrying



Description	Part No.
KLEIN TOOLS TRADESMAN PRO™ BACKPACK	K-55421BP14

GT LINE TOOL TROLLEY BACKPACK

The GT Line Tool Trolley 01 Backpack is a hand tool storage and laptop bag that can be used as a wheeled tool trolley or worn as a backpack. This durable backpack is made from tough, puncture and tear resisting polyester fabric construction. The base of this backpack has additional reinforcing and anti-skid rubber feet.

The generous capacity of the GT Line Tool Trolley 01 Backpack includes a large main compartment that is divided by 2 reversible tool pallets. The front pallet has individual pouches for tools on both sides and the other has these pouches on the front side and is padded on the back. Behind this pallet there is a padded area to store a laptop. On the front of the bag there is a further zipped compartment containing 2 pouches for documents, accessories or small parts, and on each side of the bag is an elasticated mesh pocket.



- + Internal Dimensions (HxWxD): 440mm x 340mm x 150mm
- + Weight: 4.3kg

Description	Part No.
GT LINE TOOL TROLLEY 01 N WHEELED BACKPACK	GT-TOOLTROLLEY01N

22" TOOL BOX

Impact resistant tool box with in-lid storage, removable tote tray, top and side handles, two metal latches, three hinges and a built-in padlock eye for security.

- + Dimensions H 310 x W 564 x D 310 mm
- + Weight 2.78 kg



Description	Part No.
HILKA TOOL BOX WITH TRAY - 22"	23593

GAS SAFE KIT

Gas Safe Kit designed for engineers working on gas equipment.

The kit contains

- + x5 Copper Olives 15mm
- + x5 Copper Olive 22mm
- + x5 Brass Olive 22mm
- + x5 15mm Compression Stop Cap
- + x5 22mm Compression Stop Cap
- + x5 Brass Stop Cap 1/8"
- + x5 Brass Stop Cap 1/4"
- + x5 Brass Stop Cap 3/8"
- + x5 Brass Stop Cap 1/2"
- + x5 Brass Stop Cap 3/4"
- + x5 Brass Stop Cap 1"
- + x5 Brass Stop Plug 1/8"
- + x5 Brass Stop Plug 1/4"
- + x5 Brass Stop Plug 3/8"
- + x5 Brass Stop Plug 1/2"
- + x5 Brass Stop Plug 3/4"
- + x5 Brass Stop Plug 1"
- + x5 Test Point Nipple 1/8"
- + x5 Smoke Matches - Box of 12
- + x5 Safety Labels (Do Not Use)



Image does not include all the contents of the kit

- + x1 Gas Leak Detector Fluid with brush
- + x1 Gas ID Tape
- + x1 Gas ID Tape LPG
- + x1 Rocol Leak Detector Spray
- + x1 Molycote Gas Cock Grease
- + x1 Rocol Penetrating Release Spray
- + x1 Rocol GASSEAL Non-Setting Pipe Sealant
- + x1 Testo 745 Non-Contact Voltage Tester
- + x1 Hilka Tool Box with Tray - 22"

Description	Part No.
GAS SAFE KIT	706020

ACC SPECIALIST GREASE & SEALANTS

Description	Size	Part No.
SGM494 TRANSLUCENT POTABLE SILICONE GREASE -50 to +200°C	50g	SGM494
Description	Size	Part No.
SILCOSET 153 TRANSLUCENT SILICONE SEALANT -60 to +225°C	75ml	501002
SILCOSET 153 TRANSLUCENT SILICONE SEALANT -60 to +225°C	310ml	501005
SILCOSET 152 WHITE SILICONE SEALANT -60 to +300°C	75ml	501001
SILCOSET 152 WHITE SILICONE SEALANT -60 to +300°C	310ml	501004
SILCOSET 158 BLACK SILICONE SEALANT -60 to +300°C	75ml	501003
SILCOSET 158 BLACK SILICONE SEALANT -60 to +300°C	310ml	501006
AS1502 GREY FOODSAFE ADHESIVE SILICONE SEALANT -50 to +300°C	310ml	501007
AS1504 RED ADHESIVE SILICONE SEALANT -50 to +300°C	310ml	501009



DRAPER CAULKING GUN

For 310mm cartridges.

Description	Part No.
CAULKING GUN	16238



FERNOX LS-X SEALANT

Fast acting silicone paste suitable for use as an external sealing or joining compound. WRAS Approved.

Description	Part No.
LS-X LEAK SEALER EXTERNAL 50G	603022



LOCTITE 55 SEALING TAPE

Suitable for potable water and gas pipework to replace pastes or hemp etc.

Description	Part No.
LOCTITE 55 SEALING TAPE 50m	501082
LOCTITE 55 SEALING TAPE 150m	501083



PTFE TAPE

Description	Part No.
PTFE TAPE 12M BS7786 WRAS approved product	501080



ROCOL LUBRICANTS, CLEANING & PENETRATING SPRAYS



Description	Part No.
FOODLUBE UNIVERSAL GREASE food grade non-toxic lubricant fortified with PTFE 300ml	15231
FOODLUBE MULTIPASTE anti-seize lubricant paste 85g	15750
SILICONE GREASE SAPPHIRE AQUA-SIL for use at extreme temperatures 85g	12251
FOODLUBE SPRAY food grade multipurpose lubricant spray 300 ml	15710
FOODLUBE WD SPRAY food grade lubricating spray with PTFE 300 ml	15010
FOODLUBE CHAIN SPRAY food grade chain and conveyor lubricant 300 ml	15610
FOODLUBE DISMANTLING SPRAY food grade penetrating spray 300 ml	15720
ROCOL HEAVY DUTY CLEANER SPRAY water washable degreaser 300 ml	34011
ROCOL PENETRATING SPRAY contains molybdenum disulphide 300 ml	14021
PRECISION AIR DUSTER for removal of dust and debris from delicate or hard to reach items 300ml	32310

DRAPER GREASE GUN

Lever action gun for use with standard 400g grease gun cartridges. Supplied with delivery tube, connector with 1/8" BSPT thread and pressure relief valve. Safe working pressure 55MPa (8000psi).



Description	Part No.
SIDE LEVER GREASE GUN 500CC	47807

WD40 LUBRICANT AEROSOL 300ML

A multi-purpose aerosol product which actively displaces water leaving a protective film of lubricant that is an electrically non-conductive barrier. Penetrates rust and corrosion by capillary action, loosening rusted parts. Cleans away grease and grime and protects metal against rust and corrosion.



Description	Part No.
WD40 LUBRICANT AEROSOL 300ml	501061

DRAPER SILICONE SPRAY

Anti-static lubricant for metal, plastic, vinyl, rubber and wood etc. Colourless, non-toxic and CFC free.



Description	Part No.
DRAPER 400ML SILICONE SPRAY	41923

GREASE GOBBLER SPRAY

Solvent based cleaner that dissolves grease on contact, without the need to rinse, and is quick drying. Non-conductive and non-flammable.



Description	Part No.
GREASE GOBBLER CLEAN UP SPRAY 400 ml	S010133GB-1

DIVERSITECH G2G SMELL BUSTER

A unique ready to use odour elimination spray that is not a perfume or cover up but actually removes unpleasant smells from the air. Available in a 1 litre trigger spray bottle or in tablet form.



Description	Part No.
G2G SMELL BUSTER SPRAY 1LT	G2G-SMELL-BUSTER
SMELL BUSTER TABLETS 2X60G	SMELL-BUSTER

SILICONE THERMAL GREASE 20ML

Metal oxide filled silicone oil paste. Provides superior thermal conductivity for both electrical and electronic components.

- + Thermal Conductivity: 2.9W/m-K
- + Operating Temperature Range: -40°C to 200°C



Description	Part No.
SILICONE THERMAL GREASE 2.9W/M-K 20ML	501100

SILICONE THERMAL GREASE 20ML

Metal oxide filled silicone oil paste. Improves thermal conductivity for both electrical and electronic components.

- + Thermal Conductivity: 0.65W/m-K
- + Operating Temperature Range: -100°C to 200°C



Description	Part No.
SILICONE THERMAL GREASE 0.65W/M-K 20ML	501101

BOSTIK GLU & FIX ALL PURPOSE ADHESIVE 20ML

Supplied in a 20ml tube.



Description	Part No.
GLU & FIX ALL PURPOSE ADHESIVE 20ML	502001

ALU TAPE

Alu-TEC coating provides a durable anti-static surface finish with a self adhesive backing to protect insulation from damage. Suitable for temperature of -25°C to +75°C.



Description	Part No.
ROLL OF ALU TAPE 50mm wide x 45m in length	607025

ROCOL SCRUBS HAND CLEANING WIPES

Hand cleaning wipes with a citrus-based formula. Dual-textured for heavy duty cleaning that quickly loosens, dissolves and absorbs dirt, grease and grime.



Description	Part No.
SCRUBS HAND CLEANING WIPES TUB OF 72	34100

DRAPER HI-SENSITIVITY GLOVES

13 gauge polyester gloves with polyurethane coated palms and elasticated wristbands, allowing wearers to operate touch-screen devices without removal of gloves. Available in 3 sizes (M/L/XL).



Description	Part No.
HI-SENSITIVITY (SCREEN TOUCH) GLOVES - MEDIUM	65813
HI-SENSITIVITY (SCREEN TOUCH) GLOVES - LARGE	65816
HI-SENSITIVITY (SCREEN TOUCH) GLOVES - EXTRA LARGE	65822

DRAPER PROTECTIVE GLOVES

All-purpose glove ideal for use as a barrier layer. Nitrile gloves are free from allergenic latex proteins and 3 times the puncture resistance. One large size to fit all.



Description	Part No.
BOX OF 100 POWDER FREE BLACK NITRILE GLOVES	22683

PROTECTIVE GLOVES

All-purpose glove ideal for use as a barrier layer. One large size to fit all.

Description	Part No.
BOX OF 100 POWDER FREE WHITE LATEX GLOVES	901001
BOX OF 100 POWDERED WHITE LATEX GLOVES	901002
BOX OF 100 POWDER FREE BLUE VINYL GLOVES	901003
BOX OF 100 POWDERED BLUE VINYL GLOVES	901004



QUALITY ENGINEER TRAINING SIMPLIFIED

First Choice Training is the specialist training division of First Choice Group. It offers ACS gas training and assessments on a wide range of modern appliances and is an approved training partner for some of commercial catering's leading brands and key manufacturers. Using fully functional professional kitchens equipped with the very latest in educational technology, training is designed to be as practical as possible in order to develop the skills required to succeed in the industry.

First Choice Training also offers electrical competency training and a gas Managed Learning Programme for new entrants to non-domestic catering.



**TO VIEW COURSE DATES & BOOK ONLINE VISIT
WWW.FIRSTCHOICE-CS.CO.UK/TRAINING/ **



Telephone 01543 577 778

Email enquiries@firstchoice-cs.co.uk

Web www.firstchoice-cs.co.uk

Address

First Choice Group
Blakeney Way
Kingswood Lakeside
Cannock
Staffordshire
WS11 8LD

**AT THE  OF CATERING
EQUIPMENT SERVICE**